


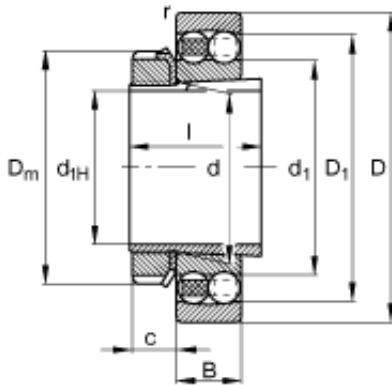

Bearing No. 1209-K-TVH-C3 + H209

	H209 / Adapter sleeve
d	45 mm
m	0,454 kg / Weight
e	0,21
D	85 mm
B	19 mm
l	33 mm
c	12 mm
Size (mm)	40x85x19
Width (mm)	19
m_1	0,22 kg / Weight, adapter sleeve
Y_1	3,04
d_1	57,7 mm
Y_2	4,7
D_m	65 mm
C_r	22000 N / Dynamic load rating (radial)
D_1	72,7 mm
Y_0	3,18
n_G	9000 1/min / Limiting speed
n_B	11100 1/min / Reference speed
C_{0r}	7300 N / Static load rating (radial)
Bearing number	1209-K-TVH-C3 + H209
C_{ur}	455 N / Fatigue limit load, radial
d_{1H}	40 mm
$r_{a \max}$	1 mm

$d_{b \text{ min}}$	48 mm
$D_{a \text{ max}}$	78 mm
$B_{a \text{ min}}$	5 mm
$d_{a \text{ max}}$	52 mm
Bore Diameter (mm)	40
Outer Diameter (mm)	85