




Bearing No. 23192-K-MB+AHX3192G

n	23,5 mm
C	240 mm
b	43 mm
a	11 mm
l	285 mm
d	460 mm
D	760 mm
B	240 mm
d5	12,5 r/min
D1	661,4 mm
d1	440 mm
Weight	470,8 Kg
r min.	7,5 mm
da min.	492 mm
Da max.	728 mm
ra max.	6 mm
Size (mm)	460x760x240
Width (mm)	240
Thread (G)	Tr480X5
Limiting speed	630 r/min
Bearing number	23192-K-MB+AHX3192G
Reference speed	390 r/min
Bore Diameter (mm)	460
Outer Diameter (mm)	760
Calculation factor (e)	0,32
Fatigue load limit (Pu)	530
Calculation factor (Y0)	2,07
Calculation factor (Y1)	2,12
Basic dynamic load rating (C)	5850 kN

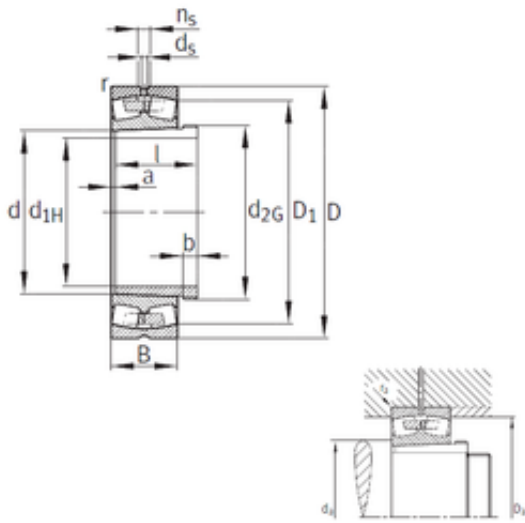

Basic static load rating (C0)	11600 kN
----------------------------------	----------