


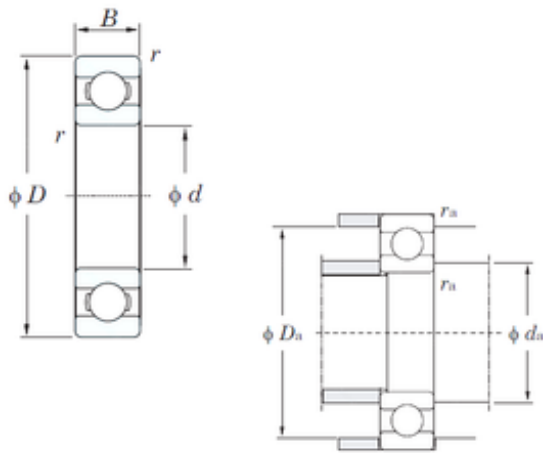

Bearing No. 6016

D	125 mm
d	80 mm
B	22 mm
C	22 mm
f0	15.6
Cu	2.25
Cr	59.5
C0r	39.8
Bore	3.15 Inch 80 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	0,85 Kg
r(min)	1.1
r min.	1,1 mm
da min.	86,5 mm
ra(max)	1
Da max.	118,5 mm
Da(max)	118.5
da(min)	86.5
ra max.	1 mm
Category	Single Row Ball Bearing
Oil lub.	6300
Inventory	0.0
Enclosure	Open
Size (mm)	80x125x22
Snap Ring	No
Width (mm)	22
Grease lub.	5300
Bearing No.	6016
Weight / LBS	2.062

Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	6016
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.866 Inch 22 Millimeter
Long Description	80MM Bore; 125MM Outside Diameter; 22MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	4.921 Inch 125 Millimeter
(Refer.)Mass(kg)	0.850
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	0.936
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	80
Outer Diameter (mm)	125
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	6300 r/min
Manufacturer Item Number	6016
Internal Special Features	No
(Grease) Lubrication Speed	5300 r/min
Basic static load rating	39,8 kN

(C0)	
Basic dynamic load rating (C)	47,6 kN
Maximum Capacity / Filling Slot	No