


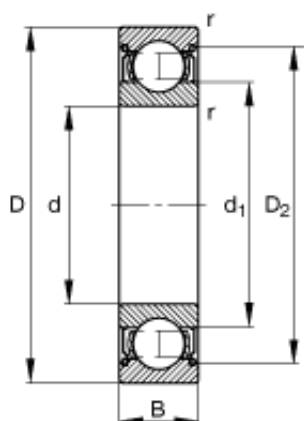

**Bearing No. 6016-2Z**

|                     |                                        |
|---------------------|----------------------------------------|
| m                   | 0,893 kg / Weight                      |
| d                   | 80 mm                                  |
| D                   | 125 mm                                 |
| B                   | 22 mm                                  |
| Size (mm)           | 80x125x22                              |
| Width (mm)          | 22                                     |
| d <sub>1</sub>      | 93,7 mm                                |
| n <sub>B</sub>      | 6100 1/min / Reference speed           |
| n <sub>G</sub>      | 6300 1/min / Limiting speed            |
| D <sub>2</sub>      | 113,7 mm                               |
| C <sub>r</sub>      | 51000 N / Dynamic load rating (radial) |
| C <sub>0r</sub>     | 40000 N / Static load rating (radial)  |
| Bearing number      | 6016-2Z                                |
| C <sub>ur</sub>     | 2340 N / Fatigue limit load, radial    |
| r <sub>min</sub>    | 1,1 mm                                 |
| r <sub>a max</sub>  | 1 mm                                   |
| d <sub>a min</sub>  | 86 mm                                  |
| D <sub>a max</sub>  | 119 mm                                 |
| Bore Diameter (mm)  | 80                                     |
| Outer Diameter (mm) | 125                                    |