


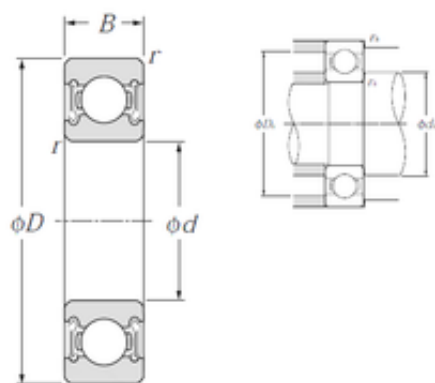

Bearing No. 6016LLB

C	22 mm
d	80 mm
D	125 mm
B	22 mm
Bore	3.15 Inch 80 Millimeter
Noun	Bearing
Weight	0,854 Kg
r min.	1,1 mm
da max	91,5 mm
UNSPSC	31171504
da min.	86,5 mm
Da max.	118,5 mm
ra max.	1 mm
Category	Single Row Ball Bearing
Size (mm)	80x125x22
Snap Ring	No
Inventory	0.0
Enclosure	2 Seals
Width (mm)	22
bore type:	Round
Weight / LBS	1.91802
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
bore diameter:	80 mm
Keyword String	Ball
overall width:	22 mm
cage material:	Steel
fillet radius:	1.1 mm

Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Bearing number	6016LLB
Enclosure Type	Non-Contact Seal
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Inner Race Width	0 Inch 0 Millimeter
Long Description	80MM Bore; 125MM Outside Diameter; 22MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Outer Race Width	0.866 Inch 22 Millimeter
Outside Diameter	4.921 Inch 125 Millimeter
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
precision rating:	ISO Class 0
Weight / Kilogram	0
inner ring width:	22 mm
outer ring width:	22 mm
outside diameter:	125 mm
Bore Diameter (mm)	80
Internal Clearance	C0-Medium
snap ring included:	Without Snap Ring

Outer Diameter (mm)	125
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	40000 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	5300 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	47500 N
Internal Special Features	No
(Grease) Lubrication Speed	5 300 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	40 kN
Basic dynamic load rating (C)	47,5 kN
Maximum Capacity / Filling Slot	No