


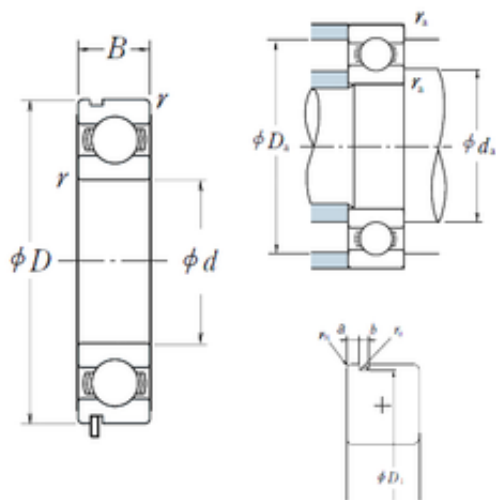

Bearing No. 6016N

a	2,87 mm
r	1.1
d	80 mm
D	125 mm
B	22 mm
C	22 mm
b	3,1 mm
fo	15.6
B_	22
ra	1
C0	40
D1	120,22 mm
D_	125
Z_	14
rn	0,5 mm
ro	0.6
DE_	115.994
SRI	6.98
D_a	118.5
DA_	13.494
SRE	6.98
DI_	89.006
yobi	6016N
mass	0.872
SBRG	10
bomp	0
KBRG	6101
SREX	0.025
SREN	-0.025
SRIN	-0.025

SDM_	102.5
SRIX	0.025
ALPHA_	0
r min.	1,1 mm
C_conv	47500
da max	91 mm
da min	86.5
Weight	0,872 Kg
LangID	1
ra max.	1 mm
Da max.	118,5 mm
Oil rpm	6300
da min.	86,5 mm
r0 max.	0,6 mm
hidYobi	6016N
GRS rpm	5300
hidTable	ecat_NSRDGB
Size (mm)	80x125x22
Prod_Type3	DGBB_SR_N_OT
Width (mm)	22
Bearing number	6016N
Bore Diameter (mm)	80
Outer Diameter (mm)	125
(Oil) Lubrication Speed	6 300 r/min
(Grease) Lubrication Speed	5 300 r/min
Basic dynamic load rating (C)	47,5 kN
Basic static load rating (C0)	40 kN