


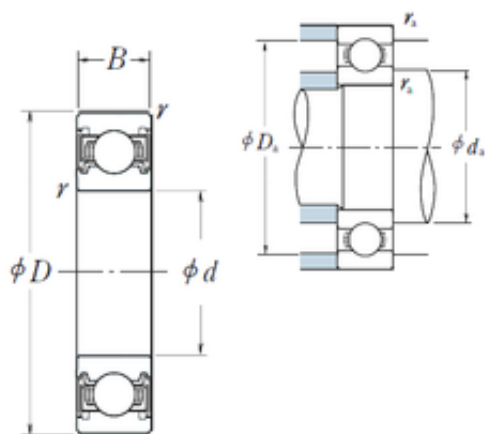

Bearing No. 6016VV

r	1.1
d	80 mm
D	125 mm
B	22 mm
C	22 mm
fo	15.6
D_	125
B_	22
ra	1
Z_	14
C0	40
DI_	89.006
SRE	6.98
D_a	118.5
DE_	115.994
SRI	6.98
DA_	13.494
SREN	-0.025
Bore	3.15 Inch 80 Millimeter
SRIN	-0.025
bomp	0
SRIX	0.025
yobi	6016VV
mass	0.872
SDM_	102.5
KBRG	6151
SREX	0.025
SBRG	10
Noun	Bearing
da max	91 mm

Weight	0,872 Kg
LangID	1
r min.	1,1 mm
da min	86.5
ALPHA_	0
C_conv	47500
UNSPSC	31171504
da min.	86,5 mm
hidYobi	6016VV
GRS rpm	5300
Da max.	118,5 mm
ra max.	1 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Enclosure	2 Seals
Size (mm)	80x125x22
Inventory	0.0
Prod_Type3	DGBB_SR_VV
Width (mm)	22
Weight / LBS	1.9228
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Bearing number	6016VV
Enclosure Type	Non-Contact Seal
Other Features	Deep Groove Rubber Seal
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outer Race Width	0.866 Inch 22 Millimeter

Outside Diameter	4.921 Inch 125 Millimeter
Long Description	80MM Bore; 125MM Outside Diameter; 22MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.nskamericas.com
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	80
Outer Diameter (mm)	125
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	5 300 r/min
Basic dynamic load rating (C)	47,5 kN
Basic static load rating (C0)	40 kN
Maximum Capacity / Filling Slot	No