


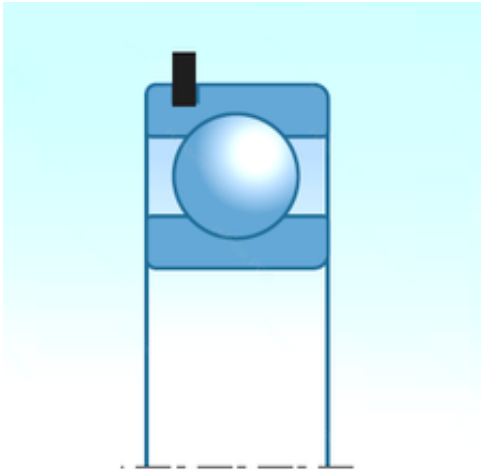

Bearing No. 6016ZNR

D	125,000 mm
d	80,000 mm
B	22,000 mm
C	22,000 mm
Bore	3.15 Inch 80 Millimeter
Noun	Bearing
UNSPSC	31171504
series:	60
Category	Single Row Ball Bearing
Snap Ring	Yes
Size (mm)	80x125x22
Enclosure	1 Metal Shield
Inventory	0.0
bore type:	Round
Width (mm)	22,000
maximum rpm:	6200 RPM
Weight / LBS	1.87
closure type:	Single Shield
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
overall width:	22 mm
fillet radius:	1.1 mm
bore diameter:	80 mm
cage material:	Steel
Keyword String	Ball
Bearing number	6016ZNR
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0

Outer Race Width	0.866 Inch 22 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	4.921 Inch 125 Millimeter
Long Description	80MM Bore; 125MM Outside Diameter; 22MM Outer Race Diameter; 1 Metal Shield; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Weight / Kilogram	0.85
Manufacturer Name	NTN
outer ring width:	22 mm
inner ring width:	22 mm
precision rating:	ISO Class 0
bearing material:	High Carbon Chrome Steel
outside diameter:	125 mm
maximum rpm (oil):	6200 rpm
Internal Clearance	C0-Medium
Bore Diameter (mm)	80,000
internal clearance:	CN
snap ring included:	With Snap Ring
Outer Diameter (mm)	125,000
Minimum Buy Quantity	N/A
static load capacity:	40000 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	5300 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	47500 N
Manufacturer Item	6016ZNR

Number	
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No