




Bearing No. 23164-E1A-MB1

|                     |                                          |
|---------------------|------------------------------------------|
| m                   | 165 kg / Weight                          |
| d                   | 320 mm                                   |
| D                   | 540 mm                                   |
| B                   | 176 mm                                   |
| e                   | 0,32                                     |
| Size (mm)           | 320x540x176                              |
| Width (mm)          | 176                                      |
| n <sub>s</sub>      | 23,5 mm                                  |
| Y <sub>1</sub>      | 2,13                                     |
| Y <sub>2</sub>      | 3,17                                     |
| D <sub>1</sub>      | 469,3 mm                                 |
| d <sub>s</sub>      | 12,5 mm                                  |
| Y <sub>0</sub>      | 2,08                                     |
| n <sub>G</sub>      | 1170 1/min / Limiting speed              |
| n <sub>B</sub>      | 660 1/min / Reference speed              |
| C <sub>r</sub>      | 3800000 N / Dynamic load rating (radial) |
| C <sub>0r</sub>     | 5900000 N / Static load rating (radial)  |
| Bearing number      | 23164-E1A-MB1                            |
| C <sub>ur</sub>     | 415000 N                                 |
| r <sub>min</sub>    | 5 mm                                     |
| r <sub>a max</sub>  | 4 mm                                     |
| d <sub>a min</sub>  | 340 mm                                   |
| D <sub>a max</sub>  | 520 mm                                   |
| Bore Diameter (mm)  | 320                                      |
| Outer Diameter (mm) | 540                                      |

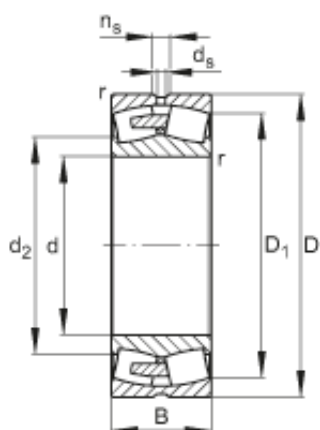