


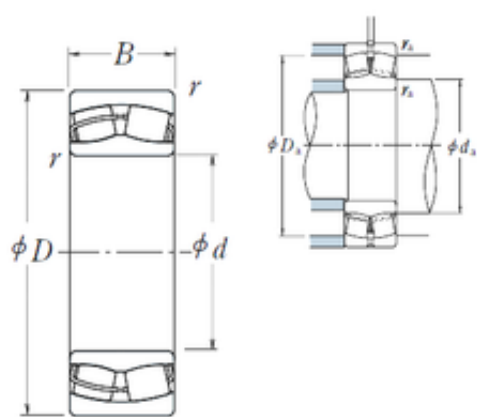

Bearing No. 23148CE4

e	0.3
r	4
d	240 mm
D	400 mm
B	128 mm
C	128 mm
Y2	3.3
C0	3100
X2	0.67
X1	1
X0	1
Y0	2.2
ra	3
Z_	21
B_	128
Y3	2.2
Y1	2.2
D_	400
DE_	360.824
SIR	51
DA_	40
DI_	282.384
ALP3	0
SDM_	321.604
SBRG	31
ALP1	11
ALP2	20
KBRG	2322
bomp	23148CE4
Bore	9.449 Inch 240

	Millimeter
yobi	23148CE4
Noun	Bearing
mass	66.9
Width	5.039 Inch 128 Millimeter
Da min	347 mm
UNSPSC	31171510
da max	275 mm
Weight	66,9 Kg
ALPHA_	0.198
da min	258
r min.	4 mm
LangID	1
da min.	258 mm
GRS rpm	670
hidYobi	23148CE4
Oil rpm	850
Da max.	382 mm
D_a max	382
ra max.	3 mm
TSR rpm	1200
D_a min	347
Category	Spherical Roller Bearing
hidTable	ecat_NSSPHR
Size (mm)	240x400x128
Inventory	0.0
Enclosure	Open
Macha rpm	0
Prod_Type3	SRB_CTB_CB
bore type:	Straight
Width (mm)	128
Weight / LBS	65

Bore Profile	Straight
Product Group	B04311
Inch - Metric	Metric
Cage Material	Steel
Bearing number	23148CE4
cage material:	Brass
bore diameter:	240 mm
overall width:	128 mm
Relubricatable	Yes
Keyword String	Spherical
Mounting Method	Shaft Mount
Rolling Element	Spherical Roller Bearing
Outside Diameter	15.748 Inch 400 Millimeter
Manufacturer URL	http://www.nskamericas.com
outer ring type:	Not Split
Long Description	240MM Straight Bore; 400MM Outside Diameter; 128MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
outside diameter:	400 mm
Manufacturer Name	NSK
Weight / Kilogram	65
Withdrawal Sleeve	Not Applicable
Internal Clearance	C0-Medium
Bore Diameter (mm)	240
Outer Diameter (mm)	400
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter

internal clearance:	C0
Minimum Buy Quantity	N/A
Harmonized Tariff Code	84823080
Calculation factor (e)	0,3
lubrication hole type:	Oil Grooves And Holes In Outer Ring
Calculation factor (Y2)	3,3
(Oil) Lubrication Speed	850 r/min
Calculation factor (Y0)	2,2
Manufacturer Item Number	23148CE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	670 r/min
Basic static load rating (C0)	3100 kN
Basic dynamic load rating (C)	1790 kN