


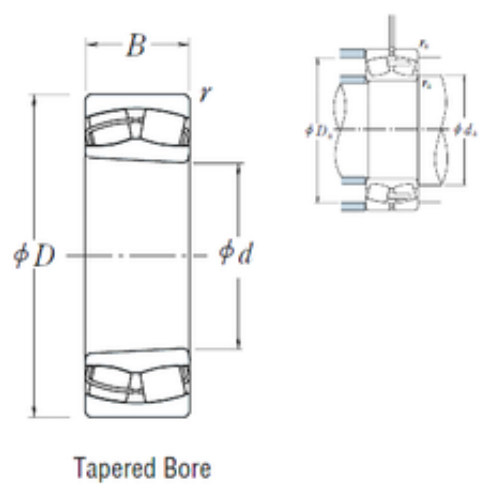

Bearing No. 23148CKE4

e	0.3
r	4
d	240 mm
D	400 mm
B	128 mm
C	128 mm
Y3	2.2
ra	3
X0	1
Z_	21
C0	3100
Y2	3.3
Y0	2.2
B_	128
X2	0.67
D_	400
Y1	2.2
X1	1
DE_	360.824
DI_	282.384
SIR	51
DA_	40
Noun	Bearing
bomp	23148CKE4
ALP2	20
ALP1	11
mass	66.9
ALP3	0
yobi	23148CKE4
SDM_	321.604

KBRG	2322
SBRG	31
Bore	9.449 Inch 240 Millimeter
Width	5.039 Inch 128 Millimeter
LangID	1
UNSPSC	31171510
da min	258
Da min	347 mm
da max	275 mm
Weight	66,9 Kg
r min.	4 mm
ALPHA_	0.198
D_a max	382
GRS rpm	670
da min.	258 mm
hidYobi	23148CKE4
Da max.	382 mm
ra max.	3 mm
Oil rpm	850
D_a min	347
TSR rpm	1200
hidTable	ecat_NSSPHR
Category	Spherical Roller Bearing
Enclosure	Open
Macha rpm	0
Inventory	0.0
Size (mm)	240x400x128
bore type:	Tapered 1:12
Width (mm)	128
Prod_Type3	SRB_CTB_TB
Weight / LBS	63

Bore Profile	Tapered
Product Group	B04311
Cage Material	Steel
Inch - Metric	Metric
Bearing number	23148CKE4
bore diameter:	240 mm
cage material:	Brass
Keyword String	Spherical
overall width:	128 mm
Relubricatable	Yes
Other Features	Order adapter or withdrawal sleeve or nut separately. Others may be available
Rolling Element	Spherical Roller Bearing
Mounting Method	Adapter Mount
Long Description	240MM Tapered Bore; 400MM Outside Diameter; 128MM Width; C0-Medium Clearance; Adapter Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable; Adapter Part
Manufacturer URL	http://www.nskamericas.com
outer ring type:	Not Split
Outside Diameter	15.748 Inch 400 Millimeter
outside diameter:	400 mm
Manufacturer Name	NSK
Weight / Kilogram	63
Withdrawal Sleeve	AH3148 AOH3148

	(Specify bore)
Bore Diameter (mm)	240
Internal Clearance	C0-Medium
Adapter Part Number	SNP3148 H3148 (Specify bore) Inch H3148 (Specify bore) Millimeter
internal clearance:	C0
Outer Diameter (mm)	400
Minimum Buy Quantity	N/A
Calculation factor (e)	0,3
Harmonized Tariff Code	84823080
lubrication hole type:	Oil Grooves And Holes In Outer Ring
Calculation factor (Y0)	2,2
Calculation factor (Y2)	3,3
(Oil) Lubrication Speed	850 r/min
Manufacturer Item Number	23148CKE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	670 r/min
Basic dynamic load rating (C)	1790 kN
Basic static load rating (C0)	3100 kN