


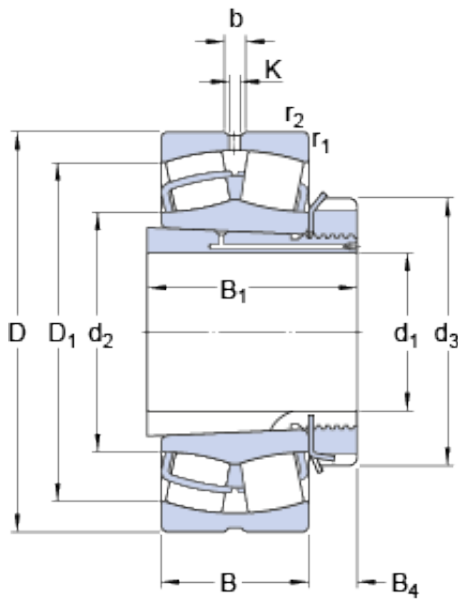

Bearing No. 23148 CCK/W33 + OH 3148 H

D	400 mm
B	128 mm
b	16.7 mm
K	9 mm
Size (mm)	400x220x128
Width (mm)	128
d ₃	300 mm
d ₁	220 mm
B ₄	37 mm
B ₁	172 mm
d ₁	220 mm
d ₂	277 mm
D ₁	348 mm
B ₁	172 mm
B ₄	37 mm
d ₃	300 mm
Bearing number	23148 CCK/W33 + OH 3148 H
Limiting speed	1600 r/min
Reference speed	1200 r/min
Bore Diameter (mm)	400
r _a max.	3 mm
B _a min.	11 mm
D _a max.	383 mm
d _b min.	254 mm
d _a max.	277 mm
Outer Diameter (mm)	220
Calculation factor e	0.3
r _{1,2} min.	4 mm

r_a - max.	3 mm
B_a - min.	11 mm
D_a - max.	383 mm
d_b - min.	254 mm
d_a - max.	277 mm
d_2 ?	277 mm
Mass bearing + sleeve	80.5 kg
D_1 ?	348 mm
Calculation factor - e	0.3
$r_{1,2}$ - min.	4 mm
Basic dynamic load rating C	2187 kN
Basic dynamic load rating - C	2187 kN
Fatigue load limit P_u	255 kN
Calculation factor Y_1	2.3
Calculation factor Y_2	3.4
Calculation factor Y_0	2.2
Calculation factor - Y_1	2.3
Calculation factor - Y_2	3.4
Fatigue load limit - P_u	255 kN
Basic static load rating C_0	3200 kN
Basic static load rating - C_0	3200 kN