




**Bearing No. 23140-B-K-MB+AH3140**

|                         |                     |
|-------------------------|---------------------|
| n                       | 17,7 mm             |
| a                       | 6 mm                |
| b                       | 21 mm               |
| d                       | 200 mm              |
| D                       | 340 mm              |
| B                       | 112 mm              |
| C                       | 112 mm              |
| l                       | 134 mm              |
| D1                      | 293,3 mm            |
| d2                      | – mm                |
| d1                      | 190 mm              |
| d5                      | 9,5 r/min           |
| r min.                  | 3 mm                |
| Weight                  | 47,2 Kg             |
| da min.                 | 214 mm              |
| Da max.                 | 326 mm              |
| ra max.                 | 2,5 mm              |
| Size (mm)               | 200x340x112         |
| Width (mm)              | 112                 |
| Thread (G)              | Tr220X4             |
| Limiting speed          | 1 700 r/min         |
| Bearing number          | 23140-B-K-MB+AH3140 |
| Reference speed         | 1 240 r/min         |
| Bore Diameter (mm)      | 200                 |
| Outer Diameter (mm)     | 340                 |
| Calculation factor (e)  | 0,35                |
| Fatigue load limit (Pu) | 131 000             |
| Calculation factor (Y0) | 1,91                |
| Calculation factor (Y1) | 1,95                |
| Basic dynamic load      | 1 320 000 kN        |

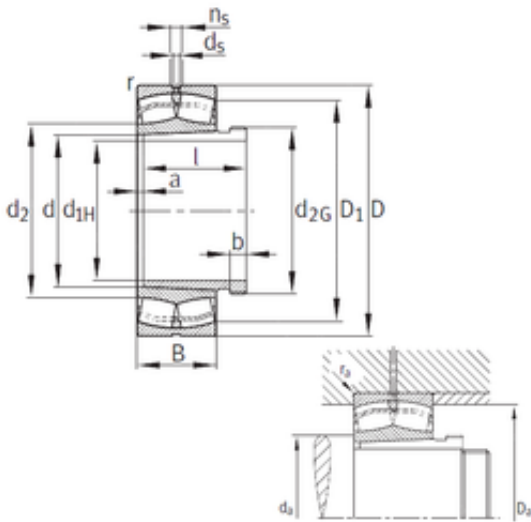

|                               |              |
|-------------------------------|--------------|
| rating (C)                    |              |
| Basic static load rating (C0) | 2 280 000 kN |