


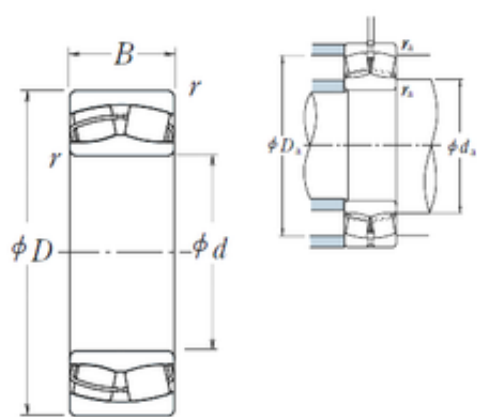

Bearing No. 23140CE4

e	0.31
r	3
d	200 mm
D	340 mm
B	112 mm
C	112 mm
Y2	3.2
C0	2330
X2	0.67
X1	1
X0	1
Y0	2.1
ra	2.5
Z_	21
B_	112
Y3	2.2
Y1	2.2
D_	340
DE_	305.554
SIR	45
DA_	34
DI_	238.959
ALP3	0
Bore	7.874 Inch 200 Millimeter
SBRG	31
ALP1	11
ALP2	40
KBRG	2322
Noun	Bearing

bomp	23140CE4
mass	42.6
yobi	23140CE4
SDM_	272.257
Width	4.409 Inch 112 Millimeter
da min	214
ALPHA_	0.204
r min.	3 mm
Weight	42,7 Kg
UNSPSC	31171510
LangID	1
da max	232 mm
Da min	293 mm
da min.	214 mm
hidYobi	23140CE4
GRS rpm	800
Oil rpm	1000
Da max.	326 mm
D_a max	326
ra max.	2,5 mm
TSR rpm	1500
D_a min	293
Category	Spherical Roller Bearing
hidTable	ecat_NSSPHR
Size (mm)	200x340x112
Inventory	0.0
Enclosure	Open
Macha rpm	0
Prod_Type3	SRB_CTB_CB
bore type:	Straight
Width (mm)	112
Weight / LBS	42.4

Bore Profile	Straight
Product Group	B04311
Inch - Metric	Metric
Cage Material	Steel
Bearing number	23140CE4
cage material:	Bronze
bore diameter:	200 mm
overall width:	112 mm
Relubricatable	Yes
Keyword String	Spherical
Mounting Method	Shaft Mount
Rolling Element	Spherical Roller Bearing
Outside Diameter	13.386 Inch 340 Millimeter
Manufacturer URL	http://www.nskamericas.com
outer ring type:	Not Split
Long Description	200MM Straight Bore; 340MM Outside Diameter; 112MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
outside diameter:	340 mm
Manufacturer Name	NSK
Weight / Kilogram	50
Withdrawal Sleeve	Not Applicable
Internal Clearance	C0-Medium
Bore Diameter (mm)	200
Outer Diameter (mm)	340
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter

internal clearance:	C0
Minimum Buy Quantity	N/A
Harmonized Tariff Code	84823080
Calculation factor (e)	0,31
lubrication hole type:	Oil Grooves And Holes In Outer Ring
Calculation factor (Y2)	3,2
(Oil) Lubrication Speed	1000 r/min
Calculation factor (Y0)	2,1
Manufacturer Item Number	23140CE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	800 r/min
Basic static load rating (C0)	2330 kN
Basic dynamic load rating (C)	1360 kN