


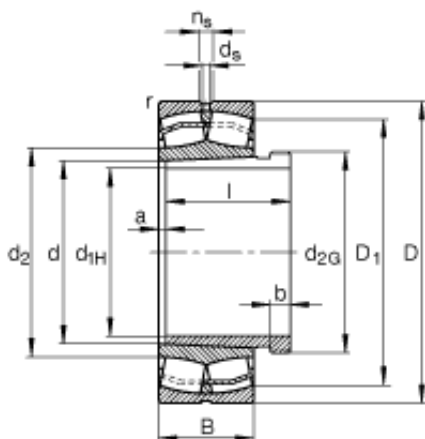

Bearing No. 23130-E1-K-TVPB + AHX3130G

	AHX3130G / Designation, withdrawal sleeve
l	96 mm
a	5 mm
m	14,5 kg / Weight
d	150 mm
e	0,29
b	15 mm
B	80 mm
D	250 mm
Size (mm)	145x250x80
Width (mm)	80
Y_2	3,45
Y_1	2,32
Y_0	2,26
C_r	1000000 N
m_1	1,66 kg / Weight, withdrawal sleeve
n_G	2650 1/min / Limiting speed
n_B	1750 1/min / Reference speed
d_s	6,3 mm
n_s	12,2 mm
d_2	170,1 mm
D_1	220,8 mm
d_{2G}	M160X3
d_{1H}	145 mm
C_{0r}	1330000 N / Static load

	rating (radial)
Bearing number	23130-E1-K-TVPB + AHX3130G
r_{min}	2,1 mm
$r_{a\ max}$	2,1 mm
$d_{a\ min}$	162 mm
$D_{a\ max}$	238 mm
Bore Diameter (mm)	145
Outer Diameter (mm)	250