


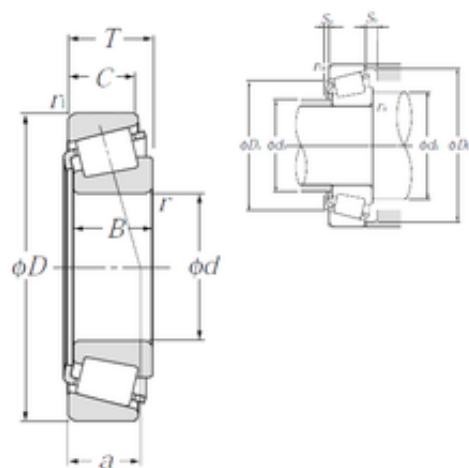

Bearing No. 32026XU

|          |         |
|----------|---------|
| a        | 43,5 mm |
| B        | 45 mm   |
| C        | 34 mm   |
| e        | 0.43    |
| d        | 130 mm  |
| D        | 200 mm  |
| T        | 45 mm   |
| Sa       | 8 mm    |
| Sb       | 11 mm   |
| Y2       | 1.38    |
| Y0       | 0.76    |
| Mass     | 4.96 kg |
| Weight   | 4,96 Kg |
| r min.   | 2,5 mm  |
| rs min   | 2 mm    |
| db min   | 144 mm  |
| Da min   | 178 mm  |
| Da max   | 190 mm  |
| da max   | 142 mm  |
| Db min   | 192 mm  |
| ra max   | 2 mm    |
| r1s min  | 2 mm    |
| Db min.  | 192 mm  |
| r1a max  | 2 mm    |
| ra max.  | 2 mm    |
| Da max.  | 190 mm  |
| da min.  | 142 mm  |
| r1 min.  | 2 mm    |
| db max.  | 144 mm  |
| ra1 max. | 2 mm    |
|          |         |

|                                 |             |
|---------------------------------|-------------|
| Category                        | Bearings    |
| Size (mm)                       | 130x200x45  |
| Inventory                       | 0.0         |
| Nlim (oil)                      | 2,200 rpm   |
| Width (mm)                      | 45          |
| Product Group                   | B04334      |
| Nlim (grease)                   | 1,700 rpm   |
| Bearing number                  | 32026XU     |
| Static load, C0                 | 545 kN      |
| Dynamic load, C                 | 320 kN      |
| Weight / Kilogram               | 0           |
| ISO 355 reference               | T4EC130     |
| Manufacturer Name               | NTN         |
| Bore Diameter (mm)              | 130         |
| Outer Diameter (mm)             | 200         |
| Minimum Buy Quantity            | N/A         |
| Calculation factor (e)          | 0,43        |
| (Oil) Lubrication Speed         | 2 200 r/min |
| Calculation factor (Y0)         | 0,76        |
| (Grease) Lubrication Speed      | 1 700 r/min |
| Rating life coefficient, A2     | 1           |
| Basic static load rating (C0)   | 545 kN      |
| Basic dynamic load rating (C)   | 320 kN      |
| Max operating temperature, Tmax | 120 °C      |
| Min operating temperature, Tmin | -40 °C      |