


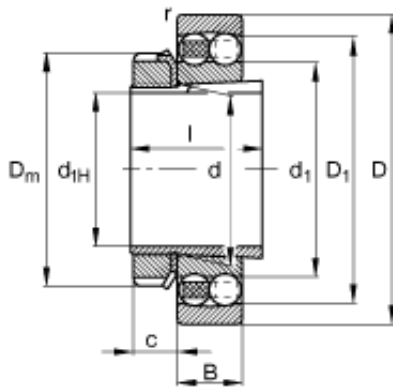

Bearing No. 2316-K-M-C3 + H2316

	H2316 / Adapter sleeve
d	80 mm
m	6,18 kg / Weight
e	0,37
D	170 mm
B	58 mm
l	78 mm
c	17 mm
Size (mm)	70x170x58
Width (mm)	58
m ₁	1,3 kg / Weight, adapter sleeve
Y ₁	1,7
d ₁	107,6 mm
Y ₂	2,62
D _m	105 mm
C _r	139000 N / Dynamic load rating (radial)
D ₁	144,5 mm
Y ₀	1,78
n _G	5600 1/min / Limiting speed
n _B	6400 1/min / Reference speed
C _{0r}	48500 N / Static load rating (radial)
Bearing number	2316-K-M-C3 + H2316
C _{ur}	2700 N / Fatigue limit load, radial
d _{1H}	70 mm
r _{a max}	2,1 mm

$d_{b \text{ min}}$	88 mm
$D_{a \text{ max}}$	158 mm
$B_{a \text{ min}}$	5 mm
$d_{a \text{ max}}$	92 mm
Bore Diameter (mm)	70
Outer Diameter (mm)	170