


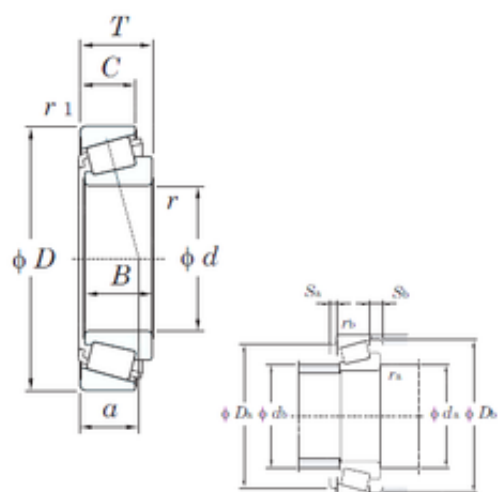

Bearing No. 32216JR

D	140 mm
d	80 mm
T	35,25 mm
B	33 mm
C	28 mm
a	31,7 mm
e	0.42
Cr	253
Y0	0.79
Y1	1.43
Cu	41.5
C0r	271
Bore	3.15 Inch 80 Millimeter
Noun	Bearing
a(mm)	31.7
Da min	122 mm
da max	90 mm
Weight	2,17 Kg
r min.	2,5 mm
r(min)	2.5
UNSPSC	31171516
Db(min)	134
db(max)	90
Da(max)	130
Da(min)	122
r1(min)	2
Sa(min)	4
Sb(min)	7
ra(max)	2
rb(max)	2

da(min)	92
ra max.	2 mm
Db min.	134 mm
Da max.	130 mm
da min.	92 mm
r2 min.	2 mm
rb max.	2 mm
Oil lub.	3600
Category	Tapered Roller Bearings Assembly
Size (mm)	80x140x35.25
Component	Assembly
Inventory	0.0
Width (mm)	35,25
Grease lub.	2700
Bearing No.	32216JR
Basic Number	32216
Weight / LBS	4.784
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	1.388 Inch 35.25 Millimeter
Bearing number	32216JR
Precision Class	Standard
(Refer.)Mass(kg)	2.17
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 80MM Bore; 140MM Outside Diameter; 35.25MM Assembly Width; Single Row of Rollers

Outside Diameter	5.512 Inch 140 Millimeter
Weight / Kilogram	2.17
Manufacturer Name	KOYO
Bore Diameter (mm)	80
Outer Diameter (mm)	140
Minimum Buy Quantity	N/A
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Calculation factor (e)	0,42
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	3600 r/min
Calculation factor (Y0)	0,79
Manufacturer Item Number	32216JR
(Grease) Lubrication Speed	2700 r/min
Basic static load rating (C0)	271 kN
Basic dynamic load rating (C)	203 kN