


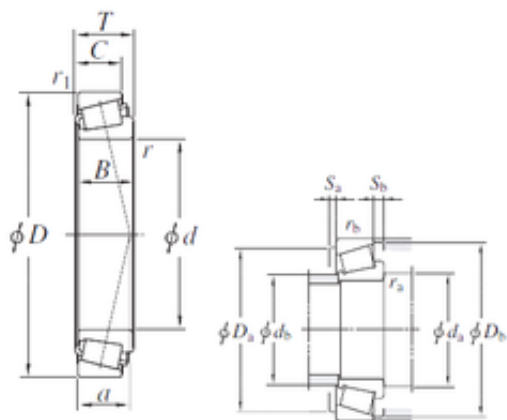

Bearing No. 32222JR

e	0.42
d	110 mm
D	200 mm
T	56 mm
B	53 mm
C	46 mm
a	46,7 mm
Y0	0.79
Y1	1.43
Db	190 mm
Cu	80.4
Cr	547
C0r	640
Noun	Bearing
Bore	4.331 Inch 110 Millimeter
a(mm)	46.7
da max	126 mm
Da min	170 mm
UNSPSC	31171516
r min.	3 mm
Weight	7,45 Kg
r(min)	3
Db(min)	190
r1(min)	2.5
da(min)	124
db(max)	126
Da(max)	188
Da(min)	170
ra(max)	2.5

Sa(min)	6
r1 min.	2,5 mm
da min.	124 mm
Da max.	188 mm
db max.	126 mm
Db min.	190 mm
ra max.	2,5 mm
r2 min.	2,5 mm
rb(max)	2
rb max.	2 mm
Sb(min)	10
Category	Tapered Roller Bearings Assembly
Oil lub.	2500
Component	Assembly
Inventory	0.0
Size (mm)	110x200x56
Width (mm)	56
Grease lub.	1900
Bearing No.	32222JR
Basic Number	32222
Weight / LBS	16.424
Product Group	B04334
Inch - Metric	Metric
Bearing number	32222JR
Assembly Width	2.205 Inch 56 Millimeter
Keyword String	Tapered
Other Features	High Load Capacity
Precision Class	Standard
(Refer.)Mass(kg)	7.45
Manufacturer URL	http://www.koyousa.com
Outside Diameter	7.874 Inch 200

	Millimeter
Long Description	Assembly; Standard Precision; 110MM Bore; 200MM Outside Diameter; 56MM Assembly Width; Single Row of Rollers
Manufacturer Name	KOYO
Weight / Kilogram	8.394
Bore Diameter (mm)	110
Outer Diameter (mm)	200
Minimum Buy Quantity	N/A
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Calculation factor (e)	0,42
Calculation factor (Y0)	0,79
(Oil) Lubrication Speed	2500 r/min
Flange Outside Diameter	0 Inch 0 Millimeter
Manufacturer Item Number	32222JR
(Grease) Lubrication Speed	1900 r/min
Basic static load rating (C0)	640 kN
Basic dynamic load rating (C)	438 kN