


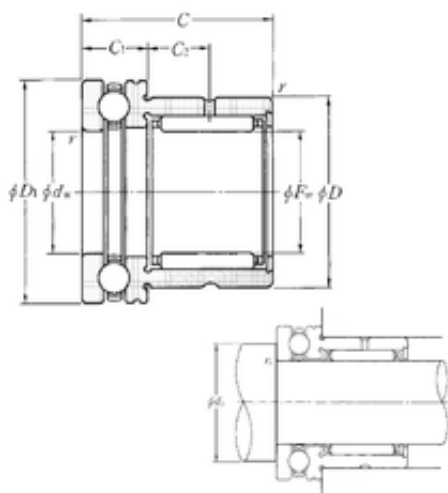

Bearing No. NKX20T2

d	20 mm
D	30 mm
C	30 mm
k	2.5 mm
dw	20 mm
Ca	14.2 kN
Fw	20 mm
D1	35 mm
C1	10 mm
Lw	15.8 mm
C2	10,5 mm
Cr	16.4 kN
Dw	2 mm
Dw1	5.56 mm
C0r	27.1 kN
C0a	24.7 kN
Mass	0.08 kg
da min	29 mm
rs min	0.3 mm
Weight	0,085 Kg
r min.	0,3 mm
ras max	0.3 mm
ra max.	0,3 mm
da min.	29 mm
Category	Roller Bearings
Inventory	0.0
Nlim (oil)	7,500 rpm
Nlim (grease)	5,200 rpm
Product Group	B04144
Bearing number	NKX20T2

Precision class	P0
Manufacturer Name	NTN
Weight / Kilogram	0.085
Bore Diameter (mm)	20
Outer Diameter (mm)	35
Minimum Buy Quantity	N/A
(Grease) Lubrication Speed	5200 r/min
Static load rating axial (C0)	24,7 kN
Dynamic load rating axial (C)	14,2 kN
Lubrication hole on outer ring	Oui/Yes
Static load rating radial (C0)	27,1 kN
Dynamic load rating radial (C)	16,4 kN
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C