


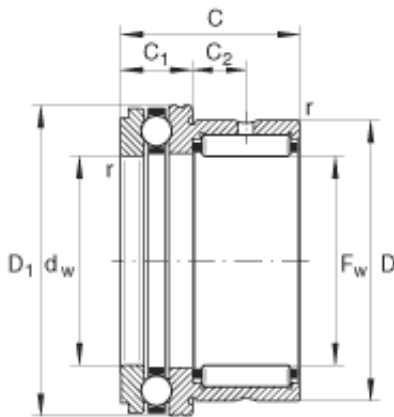

Bearing No. NKX25

	IR20X25X20 / Suitable inner ring
D	37 mm
m	125 g / Weight
Noun	Bearing
Height	1.181 Inch 30 Millimeter
Banded	No
UNSPSC	31171537
Bore 1	0.984 Inch 25 Millimeter
Bore 2	0.984 Inch 25 Millimeter
Category	Thrust Roller Bearings
Size (mm)	25x37x30
Inventory	0.0
Width (mm)	30
Weight / LBS	0.276
Inch - Metric	Metric
Product Group	B00234
d _w	25 mm / Tolerance: E8
Cage Material	Steel
C _a	19600 N / Dynamic load rating (axial)
d _a	37,7 mm
Self Aligning	No
n _G	6000 1/min / Limiting speed
F _w	25 mm
C ₂	9,5 mm
C _r	21300 N / Dynamic load

	rating (radial)
Keyword String	Combination
Thrust Bearing	Yes
Bearing number	NKX25
C_{ua}	1790 N / Fatigue limit load, axial
C_{ur}	5300 N / Fatigue limit load, radial
C_{0a}	37500 N / Static load rating (axial)
C_{0r}	30500 N / Static load rating (radial)
Rolling Element	Combination - Needle Roller and Thrust Ball Bearing
Precision Class	ABEC 1 ISO P0
r_{min}	0,6 mm
Outside Diameter	1.457 Inch 37 Millimeter
Manufacturer URL	http://www.ina.com
Long Description	25MM Bore 1; 25MM Bore 2; 37MM Outside Diameter; 30MM Height; Combination - Needle Roller and Thrust Ball Bearing; Single Direction; Not Self Aligning; Not Banded; Steel Cage; ABEC 1 ISO P0; Roller
Weight / Kilogram	0.13
$D_{1\ max}$	42,1 mm
$r_{a\ max}$	0,6 mm
Manufacturer Name	SCHAEFFLER GROUP
Bore Diameter (mm)	25
Outer Diameter (mm)	37

Minimum Buy Quantity	N/A
Component Description	Roller Assembly plus Raceways
Harmonized Tariff Code	8482.80.00.40
Manufacturer Item Number	NKX25
Single or Double Direction	Single Direction
C - 30 mm / Tolerance: -0,25	30 mm / Tolerance: 0,25
Overall Height with Aligning Washer	0 Inch 0 Millimeter
C ₁ - 11 mm / Tolerance: -0,2	11 mm / Tolerance: 0,2