


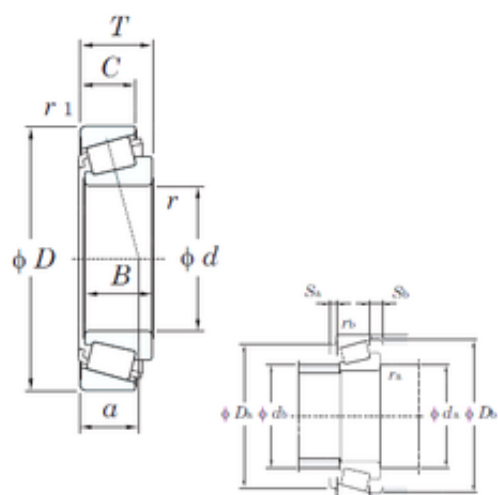

Bearing No. 32313JR

D	140 mm
d	65 mm
T	51 mm
B	48 mm
C	39 mm
a	34,7 mm
e	0.35
Cr	346
Y0	0.96
Y1	1.74
Cu	49.6
C0r	357
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
a(mm)	34.7
Da min	117 mm
da max	80 mm
Weight	3,64 Kg
r min.	3 mm
r(min)	3
UNSPSC	31171516
Db(min)	130
db(max)	80
Da(max)	128
Da(min)	117
r1(min)	2.5
Sa(min)	4
Sb(min)	12
ra(max)	2.5

rb(max)	2
da(min)	79
ra max.	2,5 mm
Db min.	130 mm
Da max.	128 mm
da min.	79 mm
r2 min.	2,5 mm
rb max.	2 mm
Oil lub.	3900
Category	Tapered Roller Bearings Assembly
Size (mm)	65x140x51
Component	Assembly
Inventory	0.0
Width (mm)	51
Grease lub.	2900
Bearing No.	32313JR
Basic Number	32313
Weight / LBS	8.025
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	2.008 Inch 51 Millimeter
Bearing number	32313JR
Precision Class	Standard
(Refer.)Mass(kg)	3.64
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 65MM Bore; 140MM Outside Diameter; 51MM Assembly Width; Single

	Row of Rollers
Outside Diameter	5.512 Inch 140 Millimeter
Weight / Kilogram	3.64
Manufacturer Name	KOYO
Bore Diameter (mm)	65
Outer Diameter (mm)	140
Minimum Buy Quantity	N/A
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Calculation factor (e)	0,35
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	3900 r/min
Calculation factor (Y0)	0,96
Manufacturer Item Number	32313JR
(Grease) Lubrication Speed	2900 r/min
Basic static load rating (C0)	357 kN
Basic dynamic load rating (C)	276 kN