




Bearing No. NU2319-E-TVP2

E	177,5 mm
F	121,5 mm
d	95 mm
D	200 mm
B	67 mm
m	9,4 kg / Weight
s	5,6 mm / Axial displacement facility from central position
Size (mm)	95x200x67
Width (mm)	67
n_B	2850 1/min
n_G	4050 1/min / Limiting speed
D_1	169,6 mm
C_r	540000 N / Dynamic load rating (radial)
C_{Or}	580000 N / Static load rating (radial)
Bearing number	NU2319-E-TVP2
C_{ur}	100000 N / Fatigue limit load, radial
r_{min}	3 mm
$r_{1 min}$	3 mm
$r_{a max}$	2,5 mm
$d_{b min}$	124 mm
$d_{a min}$	109 mm
$d_{a max}$	119 mm
$D_{a max}$	186 mm
$r_{a1 max}$	2,5 mm

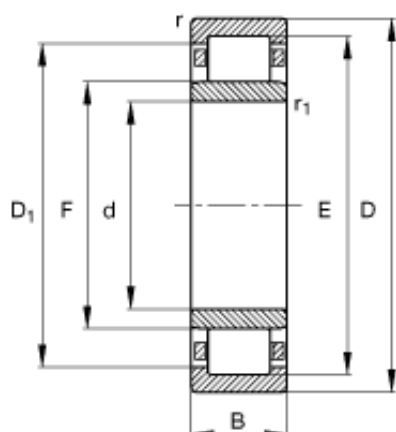

Bore Diameter (mm)	95
Outer Diameter (mm)	200