


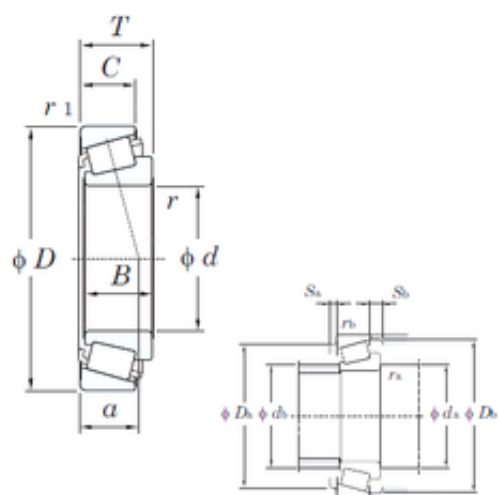

Bearing No. 32319JR

D	200 mm
d	95 mm
T	71,5 mm
B	67 mm
C	55 mm
a	49,8 mm
e	0.35
Cr	646
Cu	89.2
Y0	0.96
Y1	1.74
C0r	695
Bore	3.74 Inch 95 Millimeter
Noun	Bearing
a(mm)	49.8
Da min	166 mm
da max	115 mm
Weight	10,1 Kg
r min.	4 mm
r(min)	4
UNSPSC	31171516
Db(min)	186
db(max)	115
Da(max)	186
Da(min)	166
r1(min)	3
Sa(min)	5
Sb(min)	16.5
ra(max)	3
rb(max)	2.5

da(min)	113
ra max.	3 mm
Db min.	186 mm
Da max.	186 mm
da min.	113 mm
r2 min.	3 mm
rb max.	2,5 mm
Oil lub.	2600
Category	Tapered Roller Bearings Assembly
Size (mm)	95x200x71.5
Component	Assembly
Inventory	0.0
Width (mm)	71,5
Grease lub.	2000
Bearing No.	32319JR
Basic Number	32319
Weight / LBS	22.267
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	2.815 Inch 71.5 Millimeter
Bearing number	32319JR
Precision Class	Standard
(Refer.)Mass(kg)	10.1
Outside Diameter	7.874 Inch 200 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 95MM Bore; 200MM Outside Diameter; 71.5MM

	Assembly Width; Single Row of Rollers
Weight / Kilogram	10.94
Manufacturer Name	KOYO
Bore Diameter (mm)	95
Outer Diameter (mm)	200
Minimum Buy Quantity	N/A
Calculation factor (e)	0,35
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	2600 r/min
Calculation factor (Y0)	0,96
Manufacturer Item Number	32319JR
(Grease) Lubrication Speed	2000 r/min
Basic static load rating (C0)	695 kN
Basic dynamic load rating (C)	517 kN