


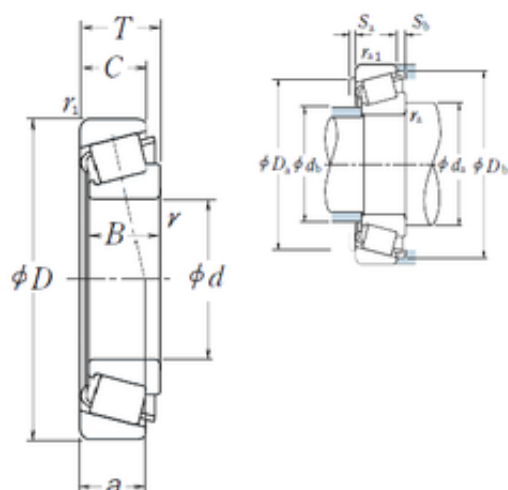

Bearing No. 32328

a	76,4 mm
e	0.37
d	140 mm
D	300 mm
T	107,75 mm
B	102 mm
C	85 mm
B_	102
da	172
Y0	0.88
C0	1440
D_	300
Sb	22.5
Sa	9
db	177
Z_	15
Y1	1.6
C_	85
Cr	101000
DE_	259.193
Iso	-
DI_	186.456
C0r	147000
DA_	37.51
D_b	281
D_a2	246
SBRG	23
SDM_	222.825
D_a1	282
yobi	32328

KBRG	3111
mass	33.9
TC-RA	574.765
r min.	5 mm
LangID	1
TC-DA2	34.904
Da min	246 mm
TC-SLR	75
ALPHA_	14
TC-DA1	40.115
Weight	33,9 Kg
T-ALP22	0
da min.	172 mm
r1 min.	4 mm
T-ALP21	28
db max.	177 mm
hidYobi	32328
rb max.	3 mm
T-ALP23	0
Da max.	282 mm
Oil rpm	160
GRS rpm	1200
ra max.	4 mm
inner r	5
Db min.	281 mm
outer r	4
inner ra	4
hidTable	ecat_NSTPRM
outer rb	3
Category	Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	0.0
Size (mm)	140x300x107.75
Prod_Type3	TRBSR_MD_A
Width (mm)	107,75
Product Group	B04334
Bearing number	32328
Weight / Kilogram	30.5
Manufacturer Name	NSK
Bore Diameter (mm)	140
Outer Diameter (mm)	300
Minimum Buy Quantity	N/A
Calculation factor (e)	0,37
(Oil) Lubrication Speed	1600 r/min
Calculation factor (Y0)	0,88
(Grease) Lubrication Speed	1200 r/min
Basic dynamic load rating (C)	985 kN
Basic static load rating (C0)	1440 kN