


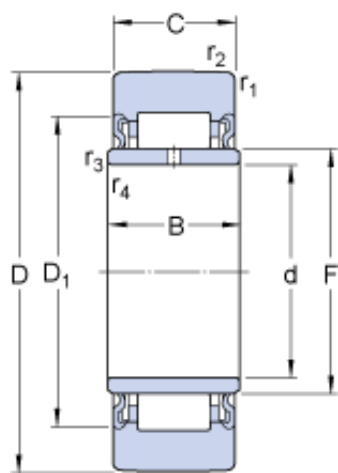

Bearing No. NA 2201.2RS

B	14 mm
F	16 mm
D	32 mm
d	12 mm
C	13.8 mm
Bore	0.472 Inch 12 Millimeter
Noun	Bearing
UNSPSC	31171530
Profile	Yoke Type
Category	Cam Followers Yoke Type
Inventory	0.0
Enclosure	Sealed
Size (mm)	12x32x13.8
Width (mm)	13,8
Roller Width	0.543 Inch 13.8 Millimeter
Weight / LBS	0.148
maximum rpm:	6000 RPM
roller width:	13.8 mm
Product Group	B04144
Inch - Metric	Metric
D ₁	22 mm
roller shape:	Crowned
D ₁	22 mm
closure type:	Sealed
Other Features	Caged With Inner Ring Lip Seal
Relubricatable	Yes
Keyword String	Cam Follower

Bearing number	NA 2201.2RS
bore diameter:	12 mm
Limiting speed	6000 r/min
standards met:	ANSI/ABMA Standard 18.1
Rolling Element	Needle Bearing
Roller Diameter	1.26 Inch 32 Millimeter
finish/coating:	Uncoated
roller material:	Chrome Steel
Long Description	12MM Bore; 32MM Roller Diameter; 13.8MM Roller Width; Crowned Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
bearing element:	Needle Rollers
Manufacturer URL	http://www.skf.com
roller diameter:	32 mm
Weight / Kilogram	0.073
Manufacturer Name	SKF
Bore Diameter (mm)	12
Mass support roller	0.067 kg
Outer Diameter (mm)	32
Minimum Buy Quantity	N/A
$r_{3,4}$ min.	0.3 mm
$r_{1,2}$ min.	0.6 mm
Harmonized Tariff Code	8482.40.00.00
$r_{3,4}$ - min.	0.3 mm
Roller Surface Profile	Crowned
$r_{1,2}$ - min.	0.6 mm
Manufacturer Item Number	NA 2201.2RS
lubrication hole location:	Inner Ring
axial static load capacity:	8.15 kN

Basic dynamic load rating C	7.04 kN
axial dynamic load capacity:	6.93 kN
radial static load capacity:	16.6 kN
operating temperature range:	Maximum of +280 °F
Basic dynamic load rating - C	7 kN
radial dynamic load capacity:	11.6 kN
Fatigue load limit P_u	1 kN
Fatigue load limit - P_u	1 kN
Basic static load rating C_0	8.5 kN
Basic static load rating - C_0	8.5 kN
Maximum dynamic radial loads - F_r	11.6 kN
Maximum static radial loads - F_{0r}	16.6 kN
Maximum dynamic radial load F_r max.	11.6 kN
Maximum static radial load F_{0r} max.	16.6 kN