


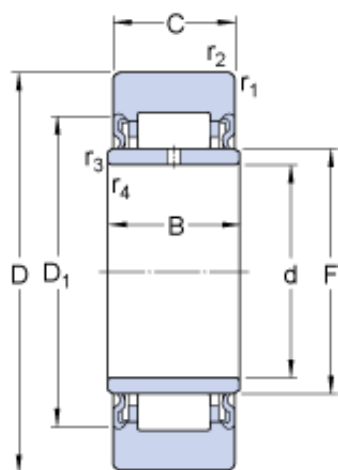

Bearing No. NA 2201.2RSX

B	14 mm
F	16 mm
D	32 mm
d	12 mm
C	13.8 mm
Bore	0.472 Inch 12 Millimeter
Noun	Bearing
UNSPSC	31171530
Profile	Yoke Type
Category	Cam Followers Yoke Type
Inventory	0.0
Enclosure	Sealed
Size (mm)	12x32x13.8
Width (mm)	13,8
Weight / LBS	0.148
Roller Width	0.543 Inch 13.8 Millimeter
D ₁	22 mm
Product Group	B04144
D ₁	22 mm
Inch - Metric	Metric
Keyword String	Cam Follower
Other Features	Caged With Inner Ring Lip Seal
Relubricatable	Yes
Bearing number	NA 2201.2RSX
Limiting speed	6000 r/min
Rolling Element	Needle Bearing
Roller Diameter	1.26 Inch 32 Millimeter

Manufacturer URL	http://www.skf.com
Long Description	12MM Bore; 32MM Roller Diameter; 13.8MM Roller Width; Flat Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
Weight / Kilogram	0.07
Manufacturer Name	SKF
Bore Diameter (mm)	12
Outer Diameter (mm)	32
Mass support roller	0.067 kg
Minimum Buy Quantity	N/A
$r_{3,4}$ min.	0.3 mm
$r_{1,2}$ min.	0.6 mm
$r_{1,2}$ - min.	0.6 mm
Harmonized Tariff Code	8482.40.00.00
$r_{3,4}$ - min.	0.3 mm
Roller Surface Profile	Flat
Manufacturer Item Number	NA 2201.2RSX
Basic dynamic load rating C	7.04 kN
Basic dynamic load rating - C	7 kN
Fatigue load limit P_u	1 kN
Fatigue load limit - P_u	1 kN
Basic static load rating C_0	8.5 kN
Basic static load rating - C_0	8.5 kN
Maximum dynamic radial loads - F_r	11.6 kN
Maximum static radial loads - F_{0r}	16.6 kN

Maximum dynamic radial load F_r max.	11.6 kN
Maximum static radial load F_{0r} max.	16.6 kN