


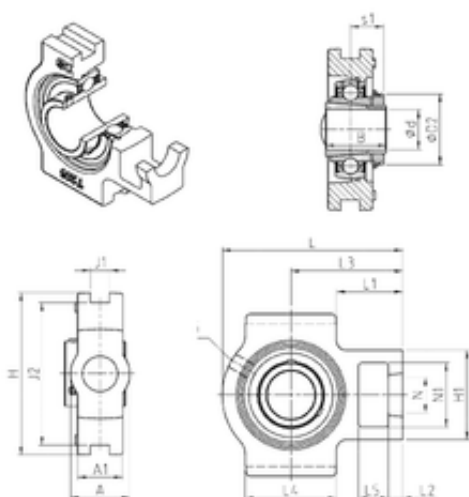

Bearing No. UKT305H

C	22.36 kN
N	26 mm
d	20 mm
G	M6x1
A	36 mm
B	35 mm
H	89 mm
L	122 mm
N2	36 mm
H2	62 mm
d1	38 mm
B1	35 mm
A5	21.5 mm
A2	26 mm
J2	80 mm
J1	12 mm
L1	43,5 mm
N1	36 mm
C0	11.5 kN
H1	62 mm
D2	38 mm
A1	26 mm
s1	21,5 mm
L3	76 mm
L2	14 mm
L5	16 mm
L4	65 mm
T max.	100 °C
Weight	1,4 Kg
T min.	-20 °C

Thread (G)	M6x1
Bearing number	UKT305H
Bore Diameter (mm)	20
Designation of housing	T305-
Designation of bearing	UK305G2H
Adapter sleeve reference	H2305
Basic dynamic load rating (C)	22,36 kN