


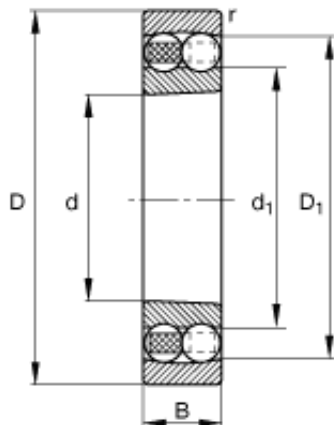

Bearing No. 2313-K-TVH-C3

|                     |                                        |
|---------------------|----------------------------------------|
| e                   | 0,39                                   |
| m                   | 3,16 kg / Weight                       |
| d                   | 65 mm                                  |
| D                   | 140 mm                                 |
| B                   | 48 mm                                  |
| Size (mm)           | 65x140x48                              |
| Width (mm)          | 48                                     |
| $C_r$               | 98000 N / Dynamic load rating (radial) |
| $Y_2$               | 2,51                                   |
| $D_1$               | 118,9 mm                               |
| $d_1$               | 85,6 mm                                |
| $Y_0$               | 1,7                                    |
| $Y_1$               | 1,62                                   |
| $n_G$               | 4800 1/min / Limiting speed            |
| $n_B$               | 7300 1/min / Reference speed           |
| $C_{0r}$            | 32000 N / Static load rating (radial)  |
| Bearing number      | 2313-K-TVH-C3                          |
| $C_{ur}$            | 1980 N / Fatigue limit load, radial    |
| $r_{min}$           | 2,1 mm                                 |
| $d_{a min}$         | 77 mm                                  |
| $D_{a max}$         | 128 mm                                 |
| $r_{a max}$         | 2,1 mm                                 |
| Bore Diameter (mm)  | 65                                     |
| Outer Diameter (mm) | 140                                    |