




Bearing No. NU1088-TB-M1

E	597 mm
F	493 mm
d	440 mm
D	650 mm
B	94 mm
m	107 kg / Weight
s	9,8 mm / Axial displacement facility from central position
Size (mm)	440x650x94
Width (mm)	94
n_B	860 1/min
n_G	1600 1/min / Limiting speed
D_1	576,2 mm
C_r	1560000 N / Dynamic load rating (radial)
C_{Or}	2750000 N / Static load rating (radial)
Bearing number	NU1088-TB-M1
C_{ur}	182000 N / Fatigue limit load, radial
r_{min}	6 mm
$r_{1 min}$	6 mm
$r_{a max}$	5 mm
$d_{b min}$	498 mm
$d_{a min}$	463 mm
$d_{a max}$	488 mm
$D_{a max}$	627 mm
$r_{a1 max}$	5 mm

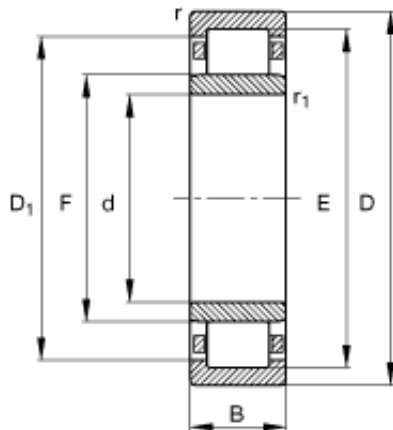

Bore Diameter (mm)	440
Outer Diameter (mm)	650