


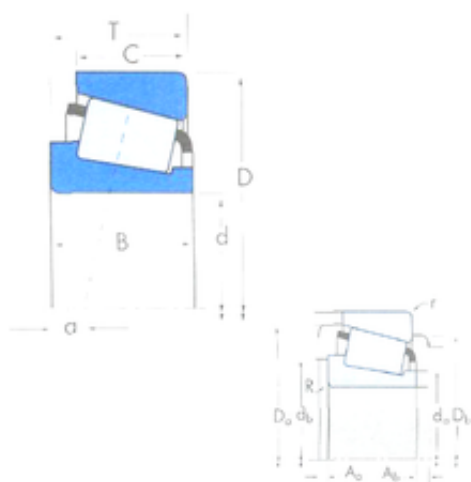

**Bearing No. 72212C/72487**

|                                 |                       |
|---------------------------------|-----------------------|
| R                               | 3,6 mm                |
| a                               | 2 mm                  |
| d                               | 53,975 mm             |
| D                               | 123,825 mm            |
| T                               | 36,512 mm             |
| B                               | 32,791 mm             |
| C                               | 25,4 mm               |
| r                               | 3,3 mm                |
| Ab                              | 4,4 mm                |
| Aa                              | 4,7 mm                |
| Db                              | 102 mm                |
| da                              | 67 mm                 |
| db                              | 79 mm                 |
| Da                              | 116 mm                |
| Weight                          | 2,13 Kg               |
| Size (mm)                       | 53.975x123.825x36.512 |
| Width (mm)                      | 36,512                |
| Factor (K)                      | 0,79                  |
| Factor (G1)                     | 57,4                  |
| Factor (Cg)                     | 0,0208                |
| Factor (G2)                     | 15,9                  |
| Bearing number                  | 72212C/72487          |
| Bore Diameter (mm)              | 53,975                |
| Outer Diameter (mm)             | 123,825               |
| Calculation factor (e)          | 0,74                  |
| Basic static load rating (C0)   | 208 kN                |
| Basic dynamic load rating (C1)  | 167 kN                |
| Basic dynamic load rating (C90) | 43,4                  |

|                                  |      |
|----------------------------------|------|
| Basic dynamic load rating (Ca90) | 54,8 |
|----------------------------------|------|