


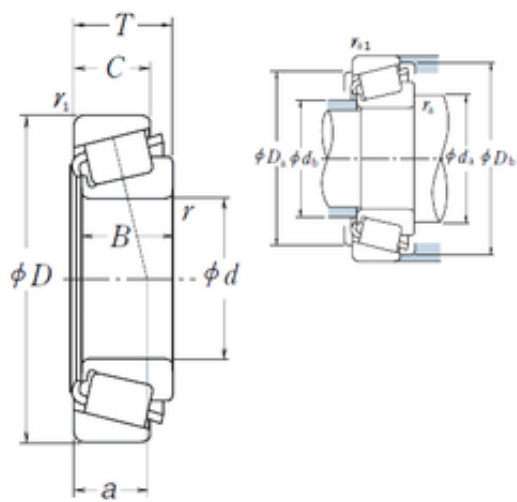

Bearing No. 72218C/72487

e	0.74
d	55,562 mm
D	123,825 mm
T	36,512 mm
B	32,791 mm
C	25,4 mm
a	38 mm
Da	102 mm
B_	32.791
Db	116 mm
da	80 mm
Y0	0.45
db	67 mm
C0	199
D_	123.825
Z_	14
C_	25.4
Y1	0.81
DE_	100.865
SLR	25.77
D_a	102
DI_	69.77
DA1	17.08
DA2	13.669
CUP	0.79
DA_	16.608
D_b	116
RAr	127.77
SDM_	85.399
KBRG	3161

yobi	72218C/72487
CONE	1.23
ALP21	52
ALP22	20
ALP23	0
BETA_	4
BET21	7
BET23	0
BET22	40
r min.	3,5 mm
LangID	1
Weight	2,02 Kg
ALPHA_	26.167
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	4000
outer r	3.3
hidYobi	72218C/72487
GRS rpm	2800
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	55.562x123.825x36.512
SHOG_yobi	72218CR/72487R
Prod_Type3	TRBSR_ID_A
Width (mm)	36,512
Bearing number	72218C/72487
Bore Diameter (mm)	55,562
Outer Diameter (mm)	123,825
Calculation factor (e)	0,74

(Oil) Lubrication Speed	4000 r/min
Calculation factor (Y0)	0,45
(Grease) Lubrication Speed	2800 r/min
Basic static load rating (C0)	199 kN
Basic dynamic load rating (C)	162 kN