


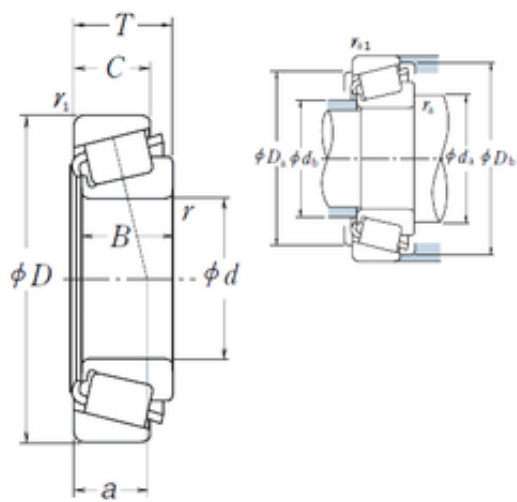

Bearing No. 72200C/72487

|      |            |
|------|------------|
| e    | 0.74       |
| d    | 50,8 mm    |
| D    | 123,825 mm |
| T    | 36,512 mm  |
| B    | 32,791 mm  |
| C    | 25,4 mm    |
| a    | 38 mm      |
| Da   | 102 mm     |
| B_   | 32.791     |
| Db   | 116 mm     |
| da   | 77 mm      |
| Y0   | 0.45       |
| db   | 67 mm      |
| C0   | 199        |
| D_   | 123.825    |
| Z_   | 16         |
| C_   | 25.4       |
| Y1   | 0.81       |
| DE_  | 100.865    |
| SLR  | 25.77      |
| D_a  | 102        |
| DI_  | 72.867     |
| DA1  | 17.08      |
| DA2  | 13.669     |
| CUP  | 0.79       |
| DA_  | 15.396     |
| D_b  | 116        |
| RAr  | 127.77     |
| SDM_ | 87.311     |
| KBRG | 3161       |
|      |            |

|                        |                     |
|------------------------|---------------------|
| yobi                   | 72200C/72487        |
| CONE                   | 1.33                |
| ALP21                  | 52                  |
| ALP22                  | 20                  |
| ALP23                  | 0                   |
| BETA_                  | 3                   |
| BET21                  | 7                   |
| BET23                  | 0                   |
| BET22                  | 40                  |
| r min.                 | 3,5 mm              |
| LangID                 | 1                   |
| Weight                 | 2,12 Kg             |
| ALPHA_                 | 26.167              |
| r1 min.                | 3,3 mm              |
| ra max.                | 3,5 mm              |
| Oil rpm                | 4000                |
| outer r                | 3.3                 |
| hidYobi                | 72200C/72487        |
| GRS rpm                | 2800                |
| inner r                | 3.5                 |
| hidTable               | ecat_NSTPRI         |
| inner ra               | 3.5                 |
| outer rb               | 3.3                 |
| ra1 max.               | 3,3 mm              |
| Size (mm)              | 50.8x123.825x36.512 |
| SHOG_yobi              | 72200CR/72487R      |
| Prod_Type3             | TRBSR_ID_A          |
| Width (mm)             | 36,512              |
| Bearing number         | 72200C/72487        |
| Bore Diameter (mm)     | 50,8                |
| Outer Diameter (mm)    | 123,825             |
| Calculation factor (e) | 0,74                |
|                        |                     |

|                               |            |
|-------------------------------|------------|
| (Oil) Lubrication Speed       | 4000 r/min |
| Calculation factor (Y0)       | 0,45       |
| (Grease) Lubrication Speed    | 2800 r/min |
| Basic static load rating (C0) | 199 kN     |
| Basic dynamic load rating (C) | 162 kN     |