


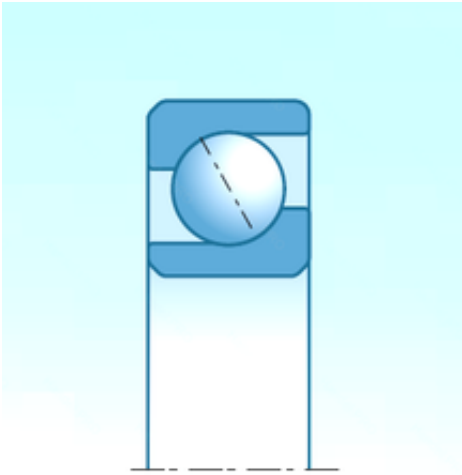

Bearing No. 7416BG

D	200,000 mm
d	80,000 mm
B	48,000 mm
C	48,000 mm
Bore	3.15 Inch 80 Millimeter
Mass	6.71 kg
Noun	Bearing
Width	1.89 Inch 48 Millimeter
da min	452 mm
Da max	186 mm
Db max	193 mm
UNSPSC	31171531
ra max	2.5 mm
rs min	3 mm
r1s min	1.1 mm
r1a max	1 mm
series:	74B
weight:	6.710 kg
Category	Angular Contact Ball Bearing
Inventory	0.0
Snap Ring	No
Size (mm)	80x200x48
Enclosure	Open
bore type:	Round
Width (mm)	48,000
Weight / LBS	14.829
Flush Ground	Yes
maximum rpm:	3600 rpm
Product Group	B00308

Inch - Metric	Metric
Contact Angle	40 Degree
Cage Material	Steel
closure type:	Open
Keyword String	Angular Contact
overall width:	48 mm
cage material:	Brass
contact angle:	40 °
fillet radius:	2.5 mm
bore diameter:	80 mm
Bearing number	7416BG
Static load, C0	132 kN
Dynamic load, C	158 kN
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Long Description	80MM Bore; 200MM Outside Diameter; 48MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring
Contact angle ?	40 °
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	7.874 Inch 200 Millimeter
outside diameter:	200 mm
bearing material:	High Carbon Chrome Steel
outer ring width:	48 mm
precision rating:	ISO Class 0
Weight / Kilogram	6.73

Manufacturer Name	NTN
Bore Diameter (mm)	80,000
Number of Bearings	1 (Single)
Internal Clearance	C0-Medium
Outer Diameter (mm)	200,000
snap ring included:	Without Snap Ring
internal clearance:	C0
Minimum Buy Quantity	N/A
Mounting Arrangement	Universal
row type & fill slot:	Single-Row Non-Fill Slot
Harmonized Tariff Code	8482.10.50.28
Radial clearance class	CN
Fatigue limit load, Cu	5.1 kN
Number of Rows of Balls	Single Row
Manufacturer Item Number	7416BG
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
radial static load capacity:	133000 N
radial dynamic load capacity:	158000 N
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Maximum Capacity / Filling Slot	No
Characteristic cage frequency, FTF	0.4 Hz
Characteristic outer ring frequency, BPF0	4.04 Hz
Characteristic inner ring frequency, BPFI	5.96 Hz

Characteristic rolling element frequency, BSF	3.86 Hz
--	---------