


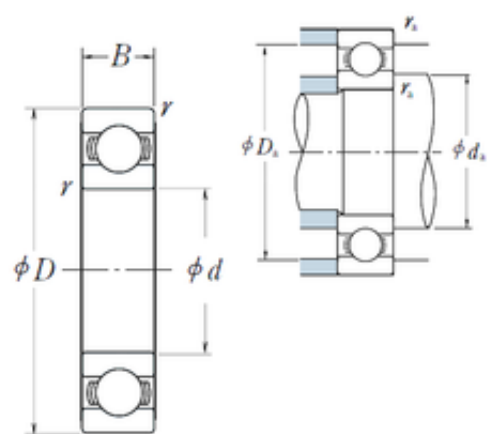

Bearing No. 6206

D	62 mm
d	30 mm
B	16 mm
C	16 mm
r	1
Z_	9
D_	62
ra	1
C0	11.3
fo	13.8
B_	16
DI_	36.975
SRI	4.81
SRE	5
D_a	57
DA_	9.525
DE_	56.025
SREX	0.04
SREN	0
SBRG	2
KBRG	6101
mass	0.199
Bore	1.181 Inch 30 Millimeter
SRIX	0.02
SRIN	0
Noun	Bearing
yobi	6206
SDM_	46.5
bomp	0

Weight	0,199 Kg
C_conv	19500
LangID	1
da min	35
r min.	1 mm
ALPHA_	0
UNSPSC	31171504
da max	38,5 mm
ra max.	1 mm
Oil rpm	13000
hidYobi	6206
GRS rpm	11000
Da max.	57 mm
da min.	35 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	30x62x16
Inventory	32.0
Enclosure	Open
Snap Ring	No
Prod_Type3	DGBB_SR_OT
Width (mm)	16
bore type:	Round
Weight / LBS	0.44
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
closure type:	Open
Bearing number	6206
Keyword String	Ball
overall width:	16 mm
bore diameter:	30 mm

Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	30MM Bore; 62MM Outside Diameter; 16MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	2.441 Inch 62 Millimeter
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.63 Inch 16 Millimeter
outside diameter:	62 mm
Manufacturer Name	NSK
Weight / Kilogram	0.199
Bore Diameter (mm)	30
Internal Clearance	C0-Medium
internal clearance:	Normal Clearance
Outer Diameter (mm)	62
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	13 000 r/min
Manufacturer Item Number	6206
manufacturer upc number:	029176014444
Internal Special Features	No
(Grease) Lubrication Speed	11 000 r/min
Basic static load rating (C0)	11,3 kN
Basic dynamic load rating (C)	19,5 kN

Maximum Capacity / Filling Slot	No
------------------------------------	----