


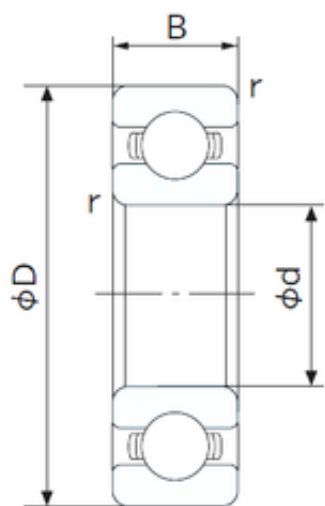

Bearing No. 6206

C	16 mm
d	30 mm
D	62 mm
B	16 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
Width	16 mm
Weight	0.199 Kg
r min.	1 mm
UNSPSC	31171504
da min.	36 mm
Da max.	56 mm
ra max.	1.0 mm
da (min)	36 mm
Da (max)	56 mm
Category	Single Row Ball Bearing
ra (max)	1 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Factor fo	13.9
Inventory	0.0
Bore Size	30 mm
Size (mm)	30x62x16
Snap Ring	No
Width (mm)	16
Weight / LBS	0.439
Configuration	Single Row
Inch - Metric	Metric
Cage Material	Steel

Product Group	B00308
Bearing number	6206
Other Features	Deep Groove
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outer Race Width	0.63 Inch 16 Millimeter
Long Description	30MM Bore; 62MM Outside Diameter; 16MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Radial Clearance	0.005 to 0.020 mm
Manufacturer URL	http://www.nachiamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	2.441 Inch 62 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Static Load Rating	11,300 N
Bore Diameter (mm)	30
Dynamic Load Rating	19,500 N
Outer Diameter (mm)	62
Minimum Buy Quantity	N/A
Limiting Speed - Oil	13,000 rpm
Fillet Radius/Chamfer	1 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	11,000 rpm
Internal Special	No

Features	
(Grease) Lubrication Speed	10000 r/min
Basic static load rating (C0)	11,3 kN
Basic dynamic load rating (C)	19,5 kN
Maximum Capacity / Filling Slot	No