


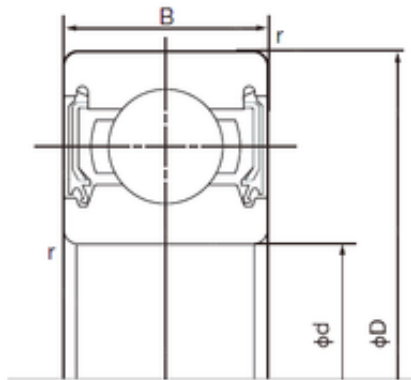

**Bearing No. 6206-2NSE9**

|                               |                   |
|-------------------------------|-------------------|
| D                             | 62 mm             |
| d                             | 30 mm             |
| B                             | 16 mm             |
| C                             | 16 mm             |
| Width                         | 16 mm             |
| r min.                        | 1.0 mm            |
| Weight                        | 0.199 kg          |
| ra (max)                      | 1 mm              |
| Da (max)                      | 56 mm             |
| da (min)                      | 36 mm             |
| Bore Size                     | 30 mm             |
| Factor fo                     | 13.9              |
| Bore Type                     | Cylindrical Bore  |
| Enclosure                     | Double Seal       |
| Size (mm)                     | 30x62x16          |
| Width (mm)                    | 16                |
| Configuration                 | Single Row        |
| Bearing number                | 6206-2NSE9        |
| Outside Diameter              | 62 mm             |
| Radial Clearance              | 0.005 to 0.020 mm |
| Static Load Rating            | 11,300 N          |
| Bore Diameter (mm)            | 30                |
| Dynamic Load Rating           | 19,500 N          |
| Outer Diameter (mm)           | 62                |
| Fillet Radius/Chamfer         | 1 mm              |
| Limiting Speed - Grease       | 7,500 rpm         |
| Basic static load rating (C0) | 11,3 kN           |
| Basic dynamic load rating (C) | 19,5 kN           |