


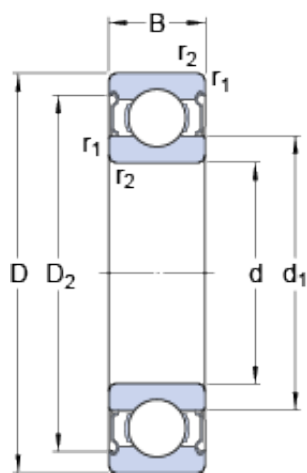

Bearing No. 6206-2Z/VA201

D	62 mm
d	30 mm
B	16 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
UNSPSC	31171504
series:	62
Category	Single Row Ball Bearing
Inventory	0.0
Snap Ring	No
Size (mm)	62x30x16
Enclosure	2 Metal Shields
bore type:	Round
Width (mm)	16
maximum rpm:	190 RPM
Weight / LBS	0.439
Mass bearing	0.21 kg
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
closure type:	Double Shielded
D ₂	54.06 mm
d ₁	40.36 mm
Keyword String	Ball
bore diameter:	30 mm
cage material:	Steel
fillet radius:	1 mm
Other Features	Deep Groove Extreme Temperature Variant

overall width:	16 mm
Bearing number	6206-2Z/VA201
Limiting speed	90 r/min
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Outer Race Width	0.63 Inch 16 Millimeter
Long Description	30MM Bore; 62MM Outside Diameter; 16MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; Polyalkylene Glycol/Graphite Mixture Filled Internal Special Fea
Outside Diameter	2.441 Inch 62 Millimeter
Manufacturer URL	http://www.skf.com
Inner Race Width	0 Inch 0 Millimeter
outside diameter:	62 mm
Weight / Kilogram	0.216
precision rating:	Not Rated
Manufacturer Name	SKF
outer ring width:	16 mm
d _a min.	35.6 mm
D _a max.	56.4 mm
Bore Diameter (mm)	62
r _a max.	1 mm
Internal Clearance	C0-Medium
d _a max.	40.3 mm
internal clearance:	C0
Outer Diameter (mm)	30
	35.6 mm

d ^a - min.	
-----------------------	--

D_a - max.	56.4 mm
d_a - max.	40.3 mm
r_a - max.	1 mm
$r_{1,2}$ min.	1 mm
Minimum Buy Quantity	N/A
resistance features:	Corrosion Resistant, Extreme Temperature
D_2 ?	54.06 mm
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	11.2 kN
d_1 ?	40.36 mm
Harmonized Tariff Code	8482.10.50.68
$r_{1,2}$ - min.	1 mm
Manufacturer Item Number	6206-2Z/VA201
Limiting temperature - T	250 °C
Internal Special Features	Polyalkylene Glycol/Graphite Mixture Filled
Basic dynamic load rating C	20.3 kN
Limiting temperature T max.	250 °C
operating temperature range:	-20 to +480 °F
Basic dynamic load rating - C	20.3 kN
Maximum Capacity / Filling Slot	No
Basic static load rating C_0	11.2 kN
Basic static load rating - C_0	11.2 kN