


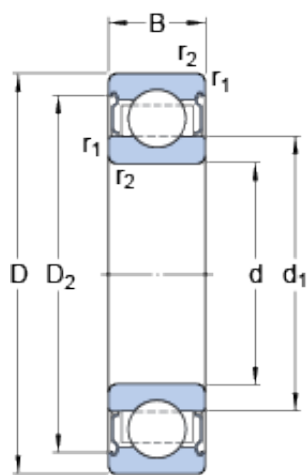

Bearing No. 6206-2Z/VA208

D	62 mm
d	30 mm
B	16 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
UNSPSC	31171504
series:	62
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	62x30x16
Inventory	0.0
Snap Ring	No
Width (mm)	16
bore type:	Round
Mass bearing	0.21 kg
Weight / LBS	0.437
closure type:	Double Shielded
D ₂	54.06 mm
d ₁	40.36 mm
Inch - Metric	Metric
Cage Material	Graphite
Product Group	B00308
Keyword String	Ball
overall width:	16 mm
fillet radius:	1 mm
bore diameter:	30 mm
Bearing number	6206-2Z/VA208
Other Features	Deep Groove Extreme Temperature Variant

Limiting speed	90 r/min
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Manufacturer URL	http://www.skf.com
Long Description	30MM Bore; 62MM Outside Diameter; 16MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; Segmented Cage Internal Special Features; C0-Medium Internal Cle
Outer Race Width	0.63 Inch 16 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	2.441 Inch 62 Millimeter
outer ring width:	16 mm
precision rating:	Not Rated
outside diameter:	62 mm
Weight / Kilogram	0.194
Manufacturer Name	SKF
Bore Diameter (mm)	62
D _a max.	56.4 mm
d _a max.	40.3 mm
Internal Clearance	C0-Medium
d _a min.	35.6 mm
r _a max.	1 mm
Outer Diameter (mm)	30
internal clearance:	C0
D _a - max.	56.4 mm
Minimum Buy Quantity	N/A
	1 mm

r_{1,2} min.	
---------------------------------	--

d_a - max.	40.3 mm
r_a - max.	1 mm
d_a - min.	35.6 mm
d_1 ?	40.36 mm
D_2 ?	54.06 mm
static load capacity:	11.2 kN
row type & fill slot:	Single Row Non-Fill Slot
$r_{1,2}$ - min.	1 mm
Harmonized Tariff Code	8482.10.50.68
Limiting temperature - T	350 °C
Manufacturer Item Number	6206-2Z/VA208
Internal Special Features	Segmented Cage
Limiting temperature T max.	350 °C
Basic dynamic load rating C	20.3 kN
Basic dynamic load rating - C	20.3 kN
Maximum Capacity / Filling Slot	No
Basic static load rating C_0	11.2 kN
Basic static load rating - C_0	11.2 kN