


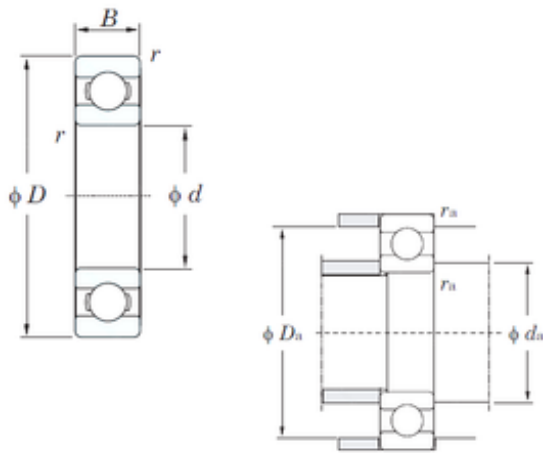

Bearing No. 6206R

|                               |             |
|-------------------------------|-------------|
| D                             | 62 mm       |
| d                             | 30 mm       |
| B                             | 16 mm       |
| C                             | 16 mm       |
| Cu                            | 1.00        |
| Cr                            | 29.2        |
| f0                            | 13.0        |
| C0r                           | 12.8        |
| Weight                        | 0,212 Kg    |
| r(min)                        | 1           |
| r min.                        | 1 mm        |
| da(min)                       | 35          |
| Da max.                       | 57 mm       |
| ra max.                       | 1 mm        |
| da min.                       | 35 mm       |
| Da(max)                       | 57          |
| ra(max)                       | 1           |
| Oil lub.                      | 13000       |
| Size (mm)                     | 30x62x16    |
| Width (mm)                    | 16          |
| Grease lub.                   | 11000       |
| Bearing No.                   | 6206R       |
| Bearing number                | 6206R       |
| (Refer.)Mass(kg)              | 0.212       |
| Bore Diameter (mm)            | 30          |
| Outer Diameter (mm)           | 62          |
| (Oil) Lubrication Speed       | 13000 r/min |
| (Grease) Lubrication Speed    | 11000 r/min |
| Basic dynamic load rating (C) | 23,4 kN     |

|                                  |         |
|----------------------------------|---------|
| Basic static load rating<br>(C0) | 12,8 kN |
|----------------------------------|---------|