


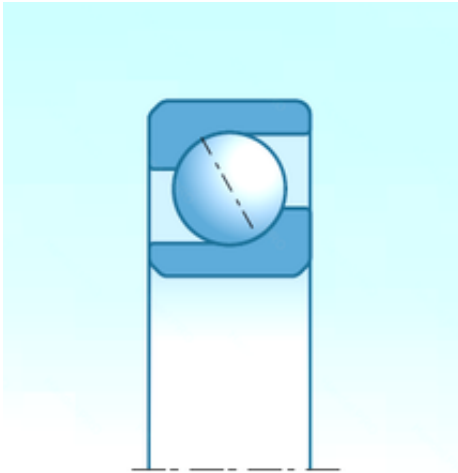

Bearing No. 7332BGM

D	340,000 mm
d	160,000 mm
B	68,000 mm
C	68,000 mm
a	139 mm
d1	231 mm
d2	181.7 mm
D1	270 mm
D2	318.8 mm
Mass	30.5 kg
Nref	2,100 rpm
Nlim	2,500 rpm
Db max	331.5 mm
Da max	322 mm
db min	178 mm
da min	178 mm
ra max	3 mm
rs min	4 mm
r1a max	1.5 mm
r1s min	1.5 mm
Size (mm)	160x340x68
Width (mm)	68,000
Bearing number	7332BGM
Dynamic load, C	354 kN
Static load, C0	451 kN
Contact angle ?	40 °
Bore Diameter (mm)	160,000
Outer Diameter (mm)	340,000
Radial clearance class	CN
Fatigue limit load, Cu	13 kN

Max operating temperature, Tmax	120 °C
Min operating temperature, Tmin	-40 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic inner ring frequency, BPFI	7.61 Hz
Characteristic outer ring frequency, BPF0	5.39 Hz
Characteristic rolling element frequency, BSF	4.37 Hz