


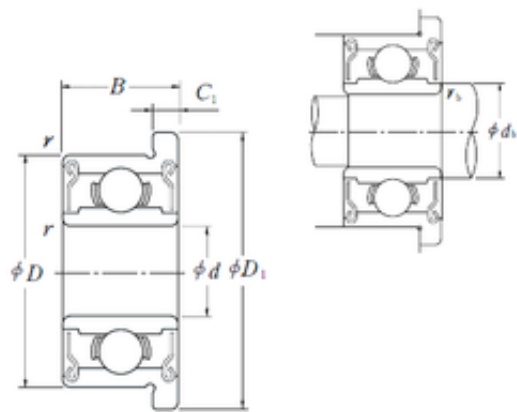

Bearing No. F698DD

C	2.24
d	8 mm
D	19 mm
B	6 mm
B1	6
db	10
Cr	228
D_	19
C0	0.91
C2	1.5
fo	12.896
B_	6
rb	0.3
C1	1,5 mm
Z_	7
D1	22 mm
D2	22
r1	0.3
DE_	16.175
D_1	22
C_1	1.5
DI_	9.825
DA_	3.175
SRE	1.78
C0r	93
SRI	1.64
SDM_	13
SRIX	0.015
SREX	0.03
SRIN	-0.015

KBRG	6191
mass	8.3
SREN	0
yobi	F698DD
LangID	1
Weight	8,3 Kg
r min.	0,3 mm
db max.	10 mm
GRS rpm	28000
hidYobi	F698DD
rb max.	0,3 mm
hidTable	ecat_NSESBMF
Size (mm)	8x22x6
Prod_Type3	ESM_MD_WF_DD
Width (mm)	6
Bearing number	F698DD
Bore Diameter (mm)	8
Outer Diameter (mm)	22
Basic static load rating (C0)	910 kN
Basic dynamic load rating (C)	2240 kN