


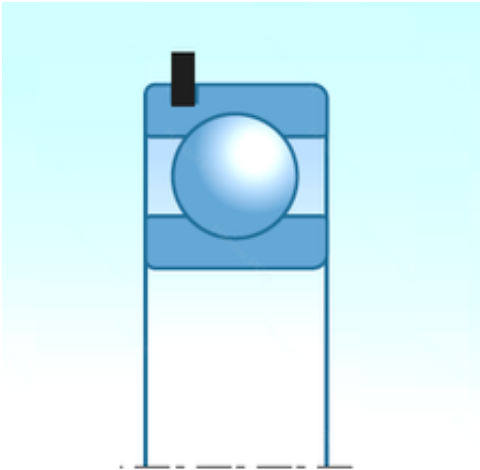

Bearing No. 6207ZZNR

C	17,000 mm
d	35,000 mm
B	17,000 mm
D	72,000 mm
Noun	Bearing
Bore	1.378 Inch 35 Millimeter
UNSPSC	31171504
series:	62
Category	Single Row Ball Bearing
Size (mm)	35x72x17
Enclosure	2 Metal Shields
Snap Ring	Yes
Inventory	0.0
Width (mm)	17,000
bore type:	Round
maximum rpm:	11000 RPM
Weight / LBS	0.635
Cage Material	Steel
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Metric
Bearing number	6207ZZNR
bore diameter:	35 mm
overall width:	17 mm
fillet radius:	1.1 mm
cage material:	Steel
Keyword String	Ball
Other Features	Deep Groove With Snap Ring Shell Alvania Prelubricated

Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Long Description	35MM Bore; 72MM Outside Diameter; 17MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	2.835 Inch 72 Millimeter
Outer Race Width	0.669 Inch 17 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0
Manufacturer Name	NTN
outer ring width:	17 mm
precision rating:	ISO Class 0
outside diameter:	72 mm
inner ring width:	17 mm
bearing material:	High Carbon Chrome Steel
Bore Diameter (mm)	35,000
Internal Clearance	C0-Medium
Outer Diameter (mm)	72,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	15300 N

maximum rpm (grease):	9800 rpm
dynamic load capacity:	25700 N
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No