


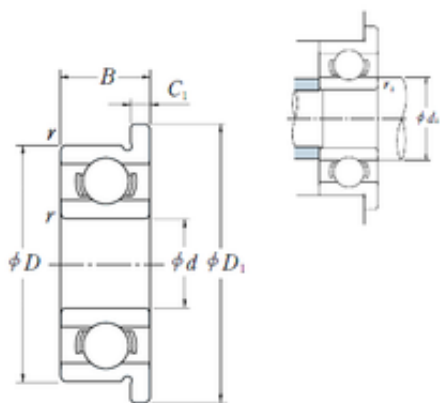

Bearing No. F696

C	1.73
r	0.2
d	6 mm
D	15 mm
B	5 mm
B0	5
D_	15
ra	0.2
Cr	177
C0	0.67
fo	12.403
da	7.6
C1	1,2 mm
D1	17 mm
Z_	7
B_	5
DE_	13.278
D_1	17
DA_	2.778
C_1	1.2
SRE	1.56
DI_	7.722
C0r	68
SRI	1.5
SREX	0.02
SRIX	0.02
SREN	0
SDM_	10.5
KBRG	6101
yobi	F696

SRIN	0
mass	4.34
LangID	1
Weight	4,34 Kg
r min.	0,2 mm
hidYobi	F696
GRS rpm	40000
Oil rpm	45000
ra max.	0,2 mm
da min.	7,6 mm
hidTable	ecat_NSESBMF
Size (mm)	6x17x5
Prod_Type3	ESM_MD_WF_OT
Width (mm)	5
Bearing number	F696
Bore Diameter (mm)	6
Outer Diameter (mm)	17
(Grease) Lubrication Speed	40000 r/min
Basic static load rating (C0)	670 kN
Basic dynamic load rating (C)	1730 kN