


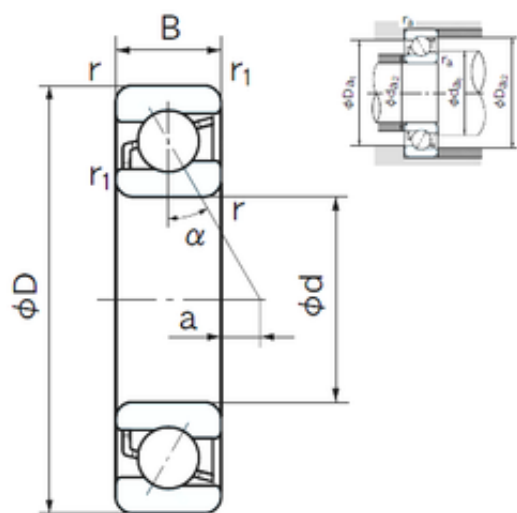

Bearing No. 7210

D	90 mm
d	50 mm
B	20 mm
C	20 mm
a	10.2 mm
r1	0.6 mm
Width	20 mm
Weight	0.485 Kg
r min.	1.1 mm
ra max.	1 mm
Da max.	83 mm
da min.	57 mm
r1 min.	0.6 mm
ra (max)	1 mm
Da1 (max)	83 mm
Da2 (max)	85 mm
da2 (min)	55 mm
da1 (min)	57 mm
Size (mm)	50x90x20
Enclosure	Open
Bore Type	Cylindrical Bore
Bore Size	50 mm
ra1 (max)	0.6 mm
Width (mm)	20
Configuration	Single Row
Bearing number	7210
Angle (?)	30 °
Outside Diameter	90 mm
Static Load Rating	31,500 N
Bore Diameter (mm)	50

Dynamic Load Rating	41,000 N
Outer Diameter (mm)	90
Limiting Speed - Oil	8,500 rpm
Fillet Radius/Chamfer	1.1 mm
Limiting Speed - Grease	6,300 rpm
(Grease) Lubrication Speed	6300 r/min
Basic static load rating (C0)	31,5 kN
Basic dynamic load rating (C)	41 kN