




Bearing No. 7210B

D	90 mm
d	50 mm
B	20 mm
C	20 mm
a	39.6 mm
Cu	1.70
Cr	46.7
f0	-
C0r	28.6
Noun	Bearing
Bore	1.969 Inch 50 Millimeter
a(mm)	39.6
Width	0.787 Inch 20 Millimeter
Weight	0.485 Kg
r min.	1.1 mm
UNSPSC	31171531
r(min)	1.1
da(min)	57
r1 min.	0.6 mm
Da max.	83 mm
r1(min)	0.6
ra max.	1 mm
Da(max)	83
ra(max)	1
da min.	57 mm
Category	Angular Contact Ball Bearing
Oil lub.	6800
Inventory	0.0

Enclosure	Open
Size (mm)	50x90x20
Snap Ring	No
Width (mm)	20
Grease lub.	5100
Bearing No.	7210B
Flush Ground	No
Contact Angle	40 Degree
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Keyword String	Angular Contact
Bearing number	7210B
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Angle (?)	40 °
(Refer.)Mass(kg)	0.485
Outside Diameter	3.543 Inch 90 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	50MM Bore; 90MM Outside Diameter; 20MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 40 Degree; 1 (Single)
Weight / Kilogram	0
Manufacturer Name	KOYO
Number of Bearings	1 (Single)
Internal Clearance	C0-Medium
Bore Diameter (mm)	50

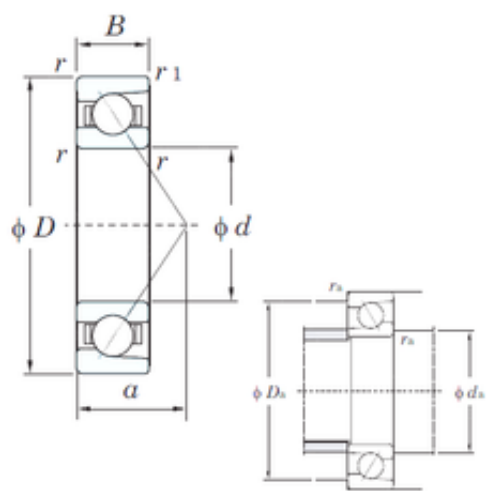

Outer Diameter (mm)	90
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
(Grease) Lubrication Speed	6400 r/min
Maximum Capacity / Filling Slot	No