


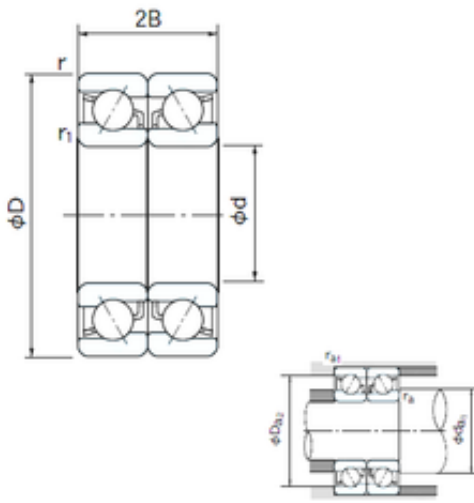

Bearing No. 7210CDB

C	20 mm
d	50 mm
B	20 mm
D	90 mm
r1	0.6 mm
2B	40 mm
a -	1.9 mm
Width	20 mm
r min.	1.1 mm
Weight	0.485 Kg
ra max.	0.6 mm
r1 min.	0.6 mm
da min.	57 mm
Da max.	85 mm
ra (max)	1 mm
da1 (min)	57 mm
Bore Size	50 mm
Enclosure	Open
Bore Type	Cylindrical Bore
ra1 (max)	0.6 mm
Size (mm)	50x90x20
da2 (min)	57 mm
Da2 (max)	85 mm
Da1 (max)	83 mm
Width (mm)	20
Configuration	Duplex
Bearing number	7210CDB
Angle (?)	15 °
Outside Diameter	90 mm
Static Load Rating	63,500 N

Bore Diameter (mm)	50
Dynamic Load Rating	70,000 N
Outer Diameter (mm)	90
Limiting Speed - Oil	13,000 rpm
Fillet Radius/Chamfer	1.1 mm
Limiting Speed - Grease	8,800 rpm
(Grease) Lubrication Speed	8800 r/min
Basic dynamic load rating (C)	70 kN
Basic static load rating (C0)	63,5 kN