


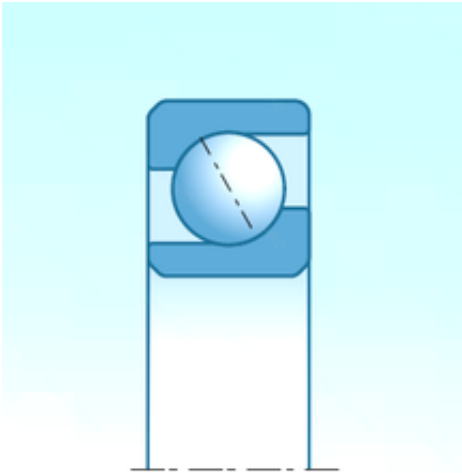

Bearing No. 7210CGD2/GNP4

B	20 mm
C	20 mm
d	50 mm
D	90 mm
Noun	Bearing
Bore	1.969 Inch 50 Millimeter
Width	1.575 Inch 40 Millimeter
UNSPSC	31171531
series:	72C
Preload	Light
Category	Precision Ball Bearings
Inventory	0.0
Size (mm)	50x90x20
Enclosure	Open
Width (mm)	20
duplex type:	Universal Flush Ground
Flush Ground	Yes
Weight / LBS	1.971
Inch - Metric	Metric
Cage Material	Nylon
Raceway Style	1 Rib Outer Ring
Product Group	B04270
Contact Angle	15 Degree
closure type:	Open
bore diameter:	50 mm
cage material:	Nylon
overall width:	40 mm
contact angle:	15 °
Keyword String	Angular Contact Ball

fillet radius:	1.1 mm
Bearing number	7210CGD2/GNP4
Other Features	Single Row Angular Contact
Precision Class	ABEC 7 ISO P4
Rolling Element	Ball Bearing
Material - Ball	Steel
Angle (?)	15 °
finish/coating:	Uncoated
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	3.543 Inch 90 Millimeter
Long Description	50MM Bore; 90MM Outside Diameter; 40MM Width; Open Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 2 (1 Pair) Bearings; 15 Degree Contact Angle; Nylon Cage Material; 1 Rib Outer Ring Racewa
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
inner ring width:	20 mm
precision rating:	ISO Class 4
Weight / Kilogram	0.9
outside diameter:	90 mm
outer ring width:	20 mm
Number of Bearings	2 (1 Pair)
Bore Diameter (mm)	50
maximum rpm (oil):	12000 rpm
Outer Diameter (mm)	90
internal clearance:	C0

Minimum Buy Quantity	N/A
Mounting Arrangement	Duplex-Universal
maximum rpm (grease):	9100 rpm
Harmonized Tariff Code	8482.10.50.28
Manufacturer Item Number	7210CGD2/GNP4
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
radial static load capacity:	63500 N
radial dynamic load capacity:	69500 N