


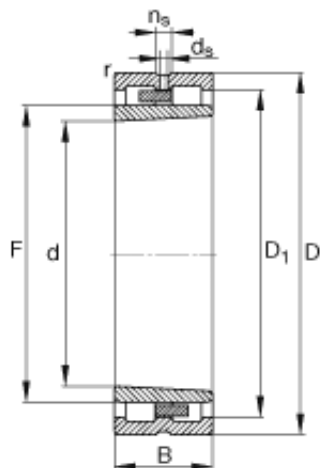

Bearing No. NNU4992-S-K-M-SP

F	510 mm
d	460 mm
D	620 mm
B	160 mm
m	134 kg / Weight
s	5,8 mm / Axial displacement facility from central position
Size (mm)	460x620x160
Width (mm)	160
C_r	2120000 N / Dynamic load rating (radial)
D_1	564,4 mm
Bearing number	NNU4992-S-K-M-SP
C_{0r}	5500000 N / Static load rating (radial)
C_{ur}	620000 N / Fatigue limit load, radial
r_{min}	4 mm
$n_{G\ OI}$	1400 1/min / Limiting speed for minimal quantity oil lubrication
$r_{a\ max}$	3 mm
$D_{b\ min}$	mm
$D_{a\ max}$	605 mm
$d_{a\ min}$	475 mm
Bore Diameter (mm)	460
$n_{G\ Fett}$	1100 1/min / Limiting speed for grease lubrication
Outer Diameter (mm)	620