


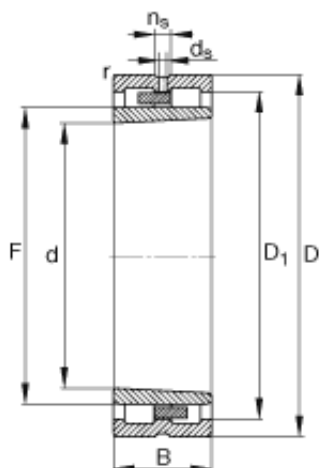

Bearing No. NNU4952-S-K-M-SP

S	4 mm / Axial displacement facility from central position
d	260 mm
D	360 mm
B	100 mm
m	30,5 kg / Weight
F	292 mm
Size (mm)	260x360x100
Width (mm)	100
C_r	750000 N / Dynamic load rating (radial)
D_1	325,6 mm
Bearing number	NNU4952-S-K-M-SP
C_{0r}	1700000 N / Static load rating (radial)
C_{ur}	216000 N / Fatigue limit load, radial
r_{min}	2,1 mm
$n_{G\ OI}$	2600 1/min / Limiting speed for minimal quantity oil lubrication
$r_{a\ max}$	2 mm
$D_{a\ max}$	350 mm
$d_{a\ min}$	270 mm
Bore Diameter (mm)	260
$n_{G\ Fett}$	2000 1/min / Limiting speed for grease lubrication
Outer Diameter (mm)	360